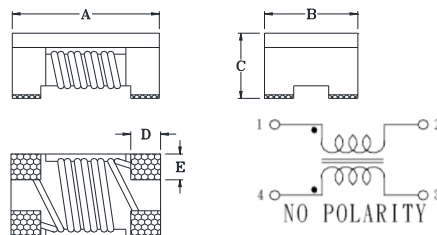


DIMENSIONS

mm

No.	Part No.	A	B	C	D	E
1	JPWC 1206S	3.2 ± 0.2	1.6 ± 0.2	1.9 ± 0.2	0.6 ± 0.1	0.6 ± 0.1
2	JPWC 0805S	2.0 ± 0.2	1.2 ± 0.2	1.2 ± 0.2	0.45 ± 0.1	0.4 ± 0.1
3	JPWC 0603S	1.60 ± 0.1	0.85 ± 0.1	1.10 ± 0.1	0.33REF.	0.25REF

SERIES LIST

No.	Part No.	Impedance (Ω) at 100MHz	RDC (Ω) Max.	IDC (mA) Max.
1	JPWC 1206S-900	$90 \pm 25\%$	0.3	370
2	JPWC 1206S-161	$160 \pm 25\%$	0.4	340
3	JPWC 1206S-221	$220 \pm 25\%$	0.5	320
4	JPWC 1206S-261	$260 \pm 25\%$	0.5	310
5	JPWC 1206S-601	$600 \pm 25\%$	0.8	260
6	JPWC 1206S-102	$1000 \pm 25\%$	1.0	230
7	JPWC 1206S-222	$2200 \pm 25\%$	1.2	200
1	JPWC 0805S-670	$67 \pm 25\%$	0.25	400
2	JPWC 0805S-900	$90 \pm 25\%$	0.35	330
3	JPWC 0805S-121	$120 \pm 25\%$	0.30	370
4	JPWC 0805S-161	$160 \pm 25\%$	0.35	330
5	JPWC 0805S-181	$180 \pm 25\%$	0.35	330
6	JPWC 0805S-221	$220 \pm 25\%$	0.35	310
7	JPWC 0805S-261	$260 \pm 25\%$	0.40	300
8	JPWC 0805S-361	$360 \pm 25\%$	0.45	280
9	JPWC 0805S-371	$370 \pm 25\%$	0.45	280
1	JPWC 0603S-220	$22 \pm 25\%$	0.080	500
2	JPWC 0603S-450	$45 \pm 25\%$	0.110	500
3	JPWC 0603S-900	$90 \pm 25\%$	0.145	500
4	JPWC 0603S-121	$120 \pm 25\%$	0.175	500
5	JPWC 0603S-181	$180 \pm 25\%$	0.210	500
6	JPWC 0603S-251	$250 \pm 25\%$	0.280	400

If you request other specification, please contact JANTEK.

CHARACTERISTIC CURVE