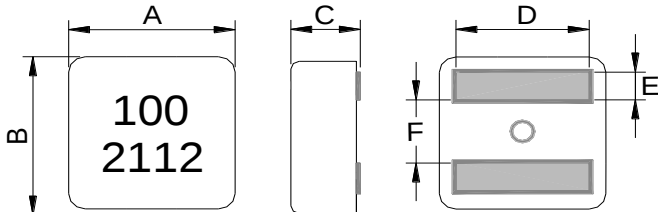


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0220518024
ITEM	JRPI 1006F-100M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	11.90	±0.30
	B	11.00	±0.30
	C	5.70	±0.30
	D	8.80	±0.50
	E	2.40	±0.20
	F	4.50	±0.30

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	10 ± 20%	μ H	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	KHz	
TEST VOLT	0.1	V	
RDC	16.5 (typ.) 18.2 (max)	mΩ	
Isat	15.0 (typ.) 13.0 (max)	A	
Irms 20°C rise	4.5 (typ.)	A	
Irms 40°C rise	9.0 (typ.)	A	

REMARK :


1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%.
3. Rated operating voltage(across inductor) 40V ref.
4. Rated DC Current : The less value whith is Irms or Isat

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0220518024

Typical Performance Curves

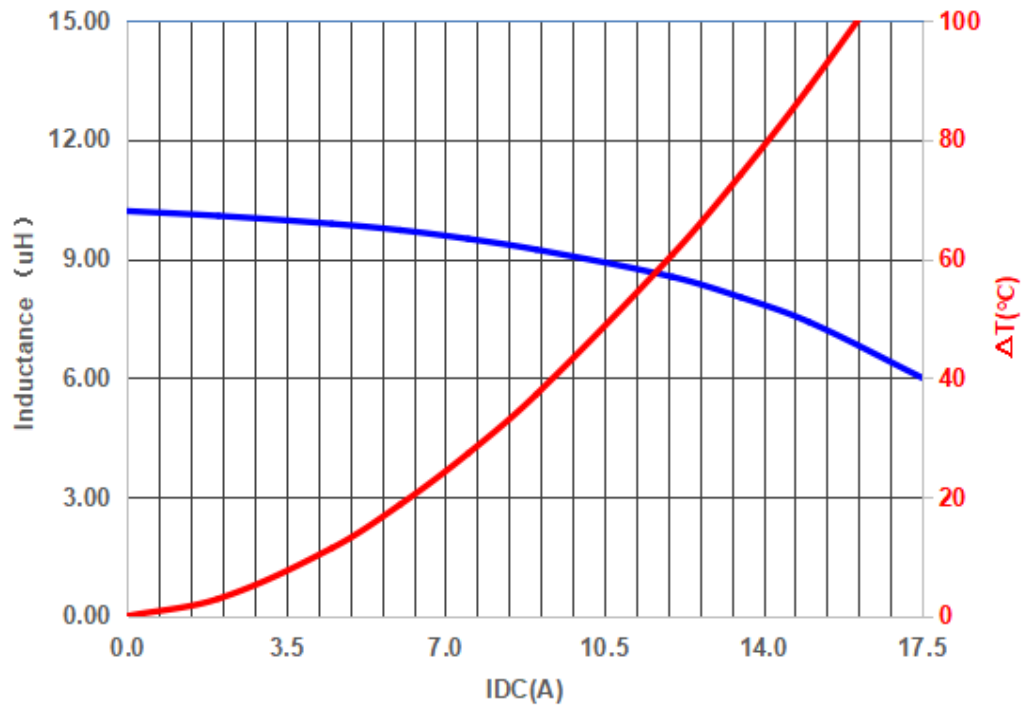

Test Instrument :

Chroma 3302 Automatic Components Analyzer
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28°C
Humidity : 60 to 70 % RH

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw