


DIMENSIONS

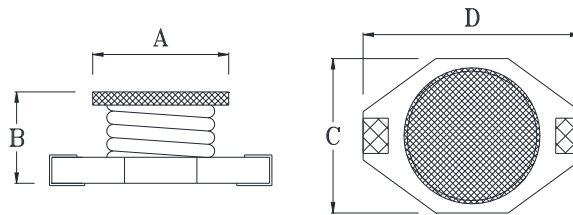

mm

No.	Part No.	A	B	C	D
1	JSPK 0802	8.6 Max.	3.0 Max.	9.5 Max.	13.50 Max.
2	JSPK 0804	8.6 Max.	5.5 Max.	9.5 Max.	13.50 Max.
3	JSPK 0810	8.6 Max.	11.5 Max.	9.5 Max.	13.50 Max.
4	JSPK 1306	13.0 Max.	7.5 Max.	15.4 Max.	18.54 Max.

SERIES LIST

No.	Part No	Inductance (μ H)	Test Freq (KHz)	RDC(m Ω) MAX	IDC(A) Max.
1	JSPK 0802 – 100M	10 $\pm$ 20%	100	0.11	2.40
2	JSPK 0802 – 150M	15 $\pm$ 20%	100	0.15	2.00
3	JSPK 0802 – 220M	22 $\pm$ 20%	100	0.23	1.60
4	JSPK 0802 – 330M	33 $\pm$ 20%	100	0.30	1.40
5	JSPK 0802 – 470M	47 $\pm$ 20%	100	0.39	1.00
6	JSPK 0802 – 680M	68 $\pm$ 20%	100	0.66	0.90
7	JSPK 0802 – 101M	100 $\pm$ 20%	100	0.84	0.70
1	JSPK 0804 – 3R3M	3.3 $\pm$ 20%	100	0.015	6.40
2	JSPK 0804 – 4R7M	4.7 $\pm$ 20%	100	0.018	5.40
3	JSPK 0804 – 6R8M	6.8 $\pm$ 20%	100	0.027	4.60
4	JSPK 0804 – 100M	10 $\pm$ 20%	100	0.038	3.80
5	JSPK 0804 – 150M	15 $\pm$ 20%	100	0.046	3.00
6	JSPK 0804 – 220M	22 $\pm$ 20%	100	0.085	2.60
7	JSPK 0804 – 330M	33 $\pm$ 20%	100	0.100	2.00
8	JSPK 0804 – 470M	47 $\pm$ 20%	100	0.140	1.60
9	JSPK 0804 – 680M	68 $\pm$ 20%	100	0.200	1.40
10	JSPK 0804 – 101M	100 $\pm$ 20%	100	0.280	1.20
11	JSPK 0804 – 151M	150 $\pm$ 20%	100	0.400	1.00
12	JSPK 0804 – 221M	220 $\pm$ 20%	100	0.610	0.80
13	JSPK 0804 – 331M	330 $\pm$ 20%	100	1.020	0.60
14	JSPK 0804 – 471M	470 $\pm$ 20%	100	1.270	0.50
1	JSPK 0810 – 100M	10 $\pm$ 20%	100	0.040	8.00
2	JSPK 0810 – 150M	15 $\pm$ 20%	100	0.050	7.00
3	JSPK 0810 – 220M	22 $\pm$ 20%	100	0.066	5.50
4	JSPK 0810 – 330M	33 $\pm$ 20%	100	0.080	4.00
5	JSPK 0810 – 470M	47 $\pm$ 20%	100	0.110	3.80
6	JSPK 0810 – 680M	68 $\pm$ 20%	100	0.170	3.00
7	JSPK 0810 – 101M	100 $\pm$ 20%	100	0.220	2.50
8	JSPK 0810 – 151M	150 $\pm$ 20%	100	0.340	2.00
9	JSPK 0810 – 221M	220 $\pm$ 20%	100	0.440	1.60
10	JSPK 0810 – 331M	330 $\pm$ 20%	100	0.700	1.20
11	JSPK 0810 – 471M	470 $\pm$ 20%	100	0.950	1.00
12	JSPK 0810 – 681M	680 $\pm$ 20%	100	1.200	1.00
13	JSPK 0810 – 102M	1,000 $\pm$ 20%	100	2.000	0.80
1	JSPK 1306 – 100M	10 $\pm$ 20%	100	0.031	10.0
2	JSPK 1306 – 150M	15 $\pm$ 20%	100	0.036	8.0
3	JSPK 1306 – 220M	22 $\pm$ 20%	100	0.047	7.0
4	JSPK 1306 – 330M	33 $\pm$ 20%	100	0.066	5.5
5	JSPK 1306 – 470M	47 $\pm$ 20%	100	0.086	4.5
6	JSPK 1306 – 680M	68 $\pm$ 20%	100	0.130	3.5
7	JSPK 1306 – 101M	100 $\pm$ 20%	100	0.190	3.0
8	JSPK 1306 – 151M	150 $\pm$ 20%	100	0.250	2.6
9	JSPK 1306 – 221M	220 $\pm$ 20%	100	0.380	2.4
10	JSPK 1306 – 331M	330 $\pm$ 20%	100	0.560	1.9
11	JSPK 1306 – 471M	470 $\pm$ 20%	100	0.850	1.4
12	JSPK 1306 – 681M	680 $\pm$ 20%	100	1.100	1.2
13	JSPK 1306 – 102M	1,000 $\pm$ 20%	100	1.800	1.0

1. Inductance drop 30% no more than initial value at rate current, temperature rises $\Delta t \leq 40^\circ\text{C}$.

2. All series could be customized to make. If you request other specification, please contact JANTEK.

