


SPECIFICATIONS



PRODUCT IDENTIFICATION

EC 24 – 100 K

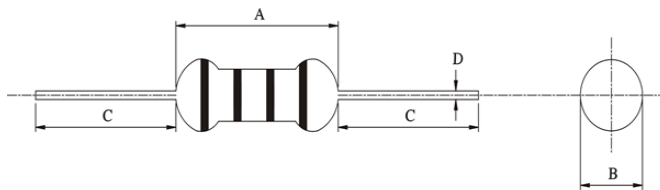

SPECIFICATIONS

No	Part No.	Dimensions (mm)				Inductance (μ H)	IDC (mA)
		A	B	C	D		
1	EC 22 (0204)	5.0 Max.	2.8 Max.	30 ± 3.0	0.5 ± 0.05	0.1 ~ 300	26 ~ 700
2	EC 24 (0307)	8.0 Max.	3.0 Max.	29.0 ± 3.0	0.5 ± 0.05	0.1 ~ 1,000	60 ~ 1,400
3	EC 36 (0410)	10.0 Max.	4.0 Max.	28.0 ± 3.0	0.6 ± 0.05	0.1 ~ 1,000	85 ~ 1,700
4	EC 46 (0510)	12.0 Max.	5.0 Max.	28.0 ± 3.0	0.6 ± 0.05	1,200 ~ 3,900	16 ~ 75

All the data listed in this catalogue are for reference only. JANTEK reserves the right to alter or revise the specifications without prior notification.
For detail specification, please contact JANTEK.

PACKAGE

Type	EC 22	EC 24	EC 36	EC 46
Q'TY/Box	3,000	3,000	2,000	1,000

