


■ SPECIFICATIONS

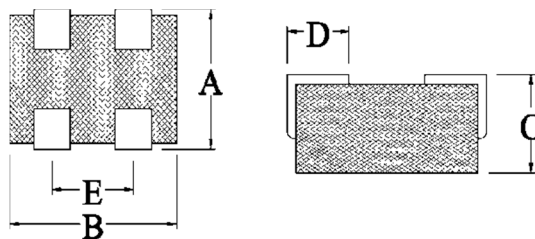

No	Part No.	Impedance (Ω)		DC Resistance ($m\Omega$)	Rated Current (A) $\Delta T=40^\circ C$	Dimensions (mm)				
		25MHz	100MHz			A	B	C	D	E
1	SMA 455625	23 typ.	35 typ	1.0^{+0}	6 Max.	4.8 ± 0.30	5.6 ± 0.20	3.0^{+0}	1.40 ± 0.15	2.54 ± 0.20
2	SMA 855625	$34 \pm 25\%$	$52 \pm 25\%$	10^{+0}	6 Max.	8.9 ± 0.40	5.6 ± 0.40	3.2^{+0}	1.50 ± 0.50	3.00 ± 0.50

■ FEATURES

- Suitable for applications with higher current.
- High mechanical body.
- Stable characteristic.

■ CHARACTERISTIC CURVE

