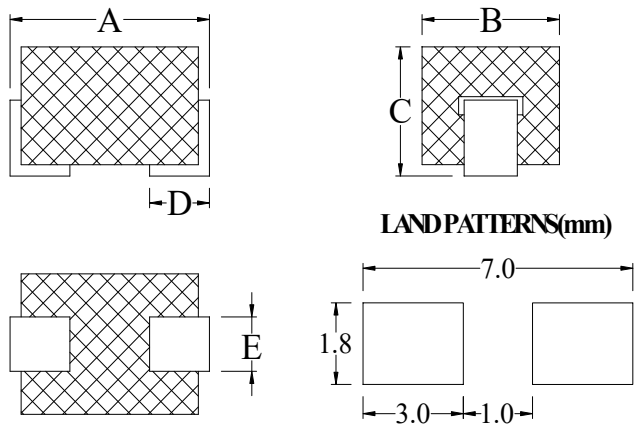


SPECIFICATION FOR APPROVAL

COMMODITY	S.M BEAD	SPEC NO.	SP-060927089
ITEM	SMB 403025	Green	版本：A 表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	5.00	Max.
	B	3.10	±0.10
	C	3.10	Max.
	D	1.35	±0.15
	E	1.25	±0.05

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE at Z1	27 (min.) Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
IMPEDANCE at Z2	47 ± 20% Ω	
TEST FREQUENCY at Z1	25 MHz	
TEST FREQUENCY at Z2	100 MHz	
IDC	16 (typ.) A	

REMARK :


1. $\Delta T = 40^{\circ}\text{C}$ rise typ at IDC .
2. Wire : 0.2 ϕ T.C.W×1.27×9mm×1Ts .

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-060927089

Typical Impedance v.s. Frequency Curve

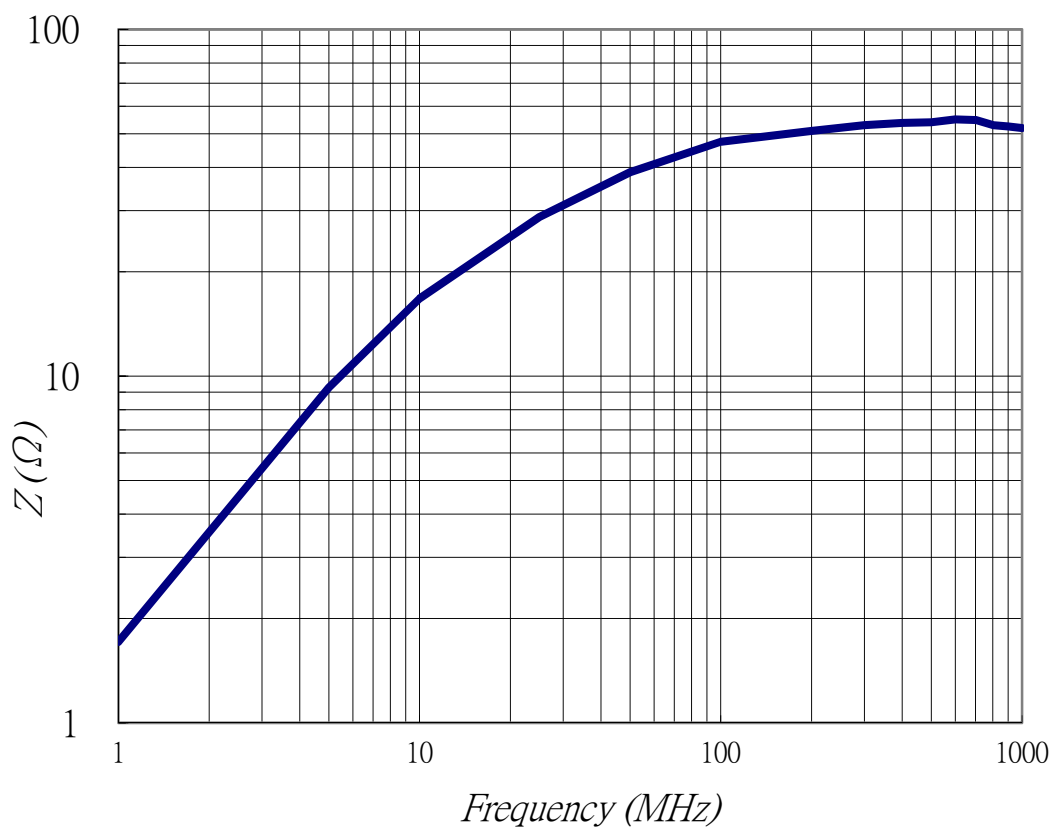

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

