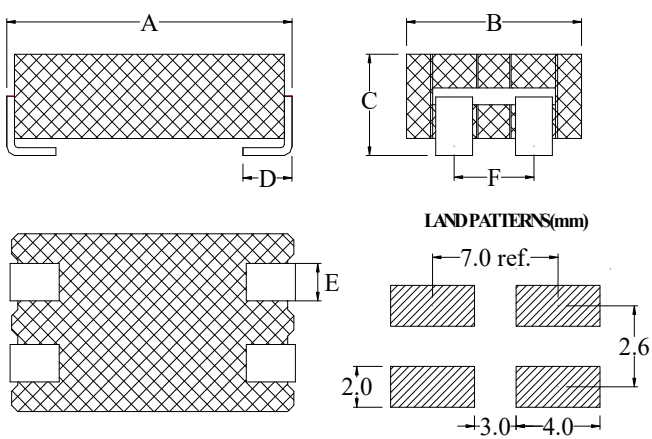


SPECIFICATION FOR APPROVAL

COMMODITY	S.M. BEADS ARRAY	SPEC NO.	SP-0150911011
ITEM	SMA 855625	Green	版本：A 表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	8.90	±0.40
	B	5.60	±0.40
	C	3.20	Max.
	D	1.50	±0.50
	E	1.25	Ref.
	F	2.60	±0.50

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE Z1	34 ± 25% Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	25 MHz	
IMPEDANCE Z2	52 ± 25% Ω	
TEST FREQUENCY	100 MHz	
DC-Resistance (RDC)	10 (max.) mΩ	
Rated Current (IDC) @ 2×1 turn	15 (typ.) A	

REMARK :


- ☐ Temperature Rise Current : The actual current when temperature of coil becomes $\Delta T = 40^{\circ}\text{C}$.
- ☐ Tested Wire : 0.2mm (T)*1.25mm(W)
- ☐ Operating Temperature : - 40°C to + 125°C

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0150911011

Typical Impedance v.s. Frequency Curve

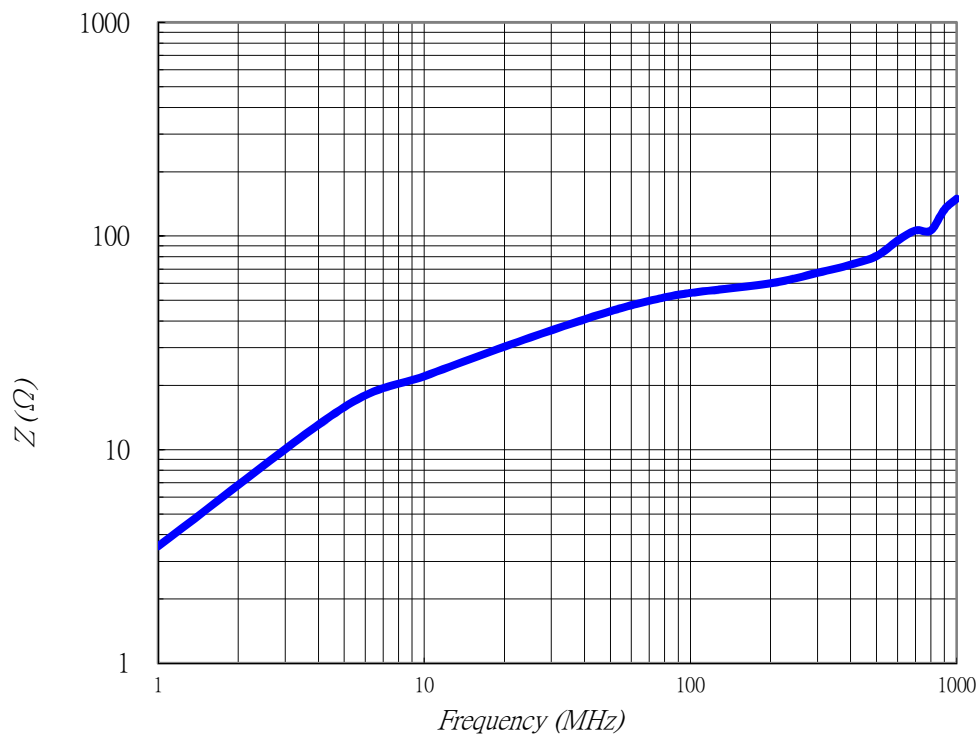

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

