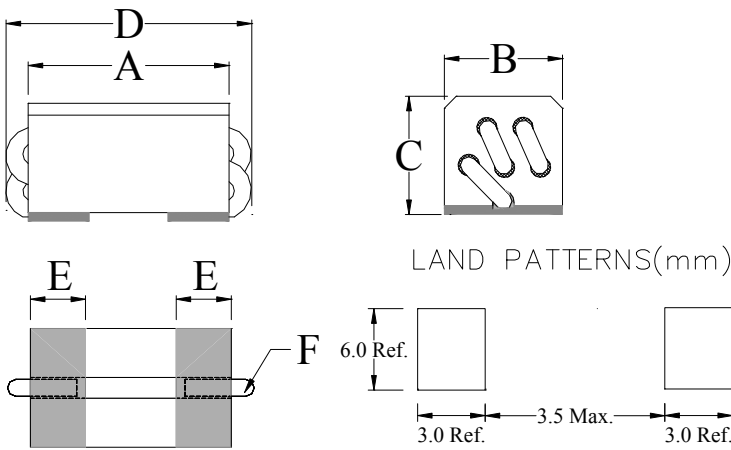


SPECIFICATION FOR APPROVAL

COMMODITY	SMD WIDE BAND CHOKE	SPEC NO.	SP-0180613003
ITEM	R5H 85	Green	版本：D 表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	8.50	±0.50
	B	5.00	±0.50
	C	4.60	±0.50
	D	11.00	Max.
	E	2.00	±0.50
	F	0.45	REF
	G		
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.
IMPEDANCE at Z1	425 (typ.) Ω
IMPEDANCE at Z2	$580 \pm 25\%$ Ω
TEST FREQUENCY at Z1	25 MHz
TEST FREQUENCY at Z2	100 MHz
RDC	12 (max) m Ω
RATED CURRENT ($\Delta T = 40^\circ C$)	5 (max) A


REMARK :
1. Temperature Rise Current : The actual current when temperature of coil becomes $\Delta T = 40^\circ C$.
2. Operating Temperature : $-40^\circ C \sim +125^\circ C$.
3. WINDING : 2.5TS.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

COMMODITY :	SMD WIDE BAND CHOKE	SPEC NO :	SP-0180613003
Type :	R5H 85	版本 : B	表單編號 : QRRD-01-04

Typical Impedance v.s. Frequency Curve

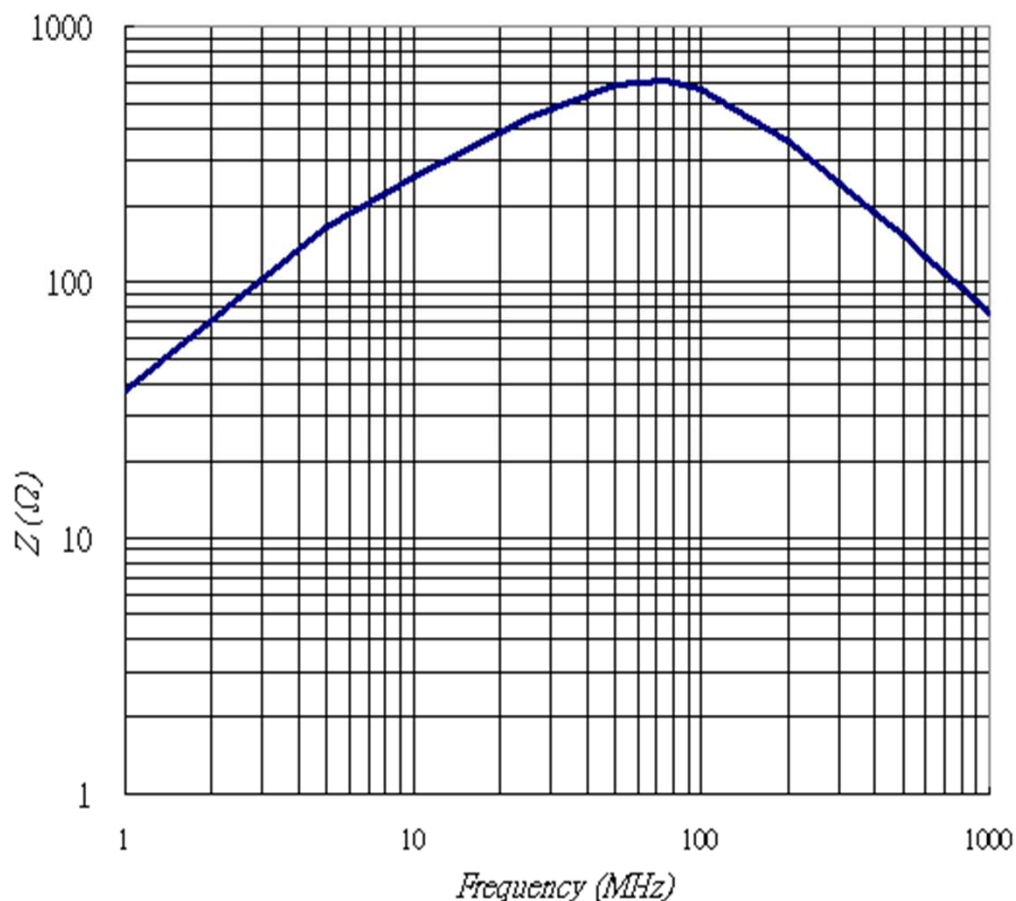

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

