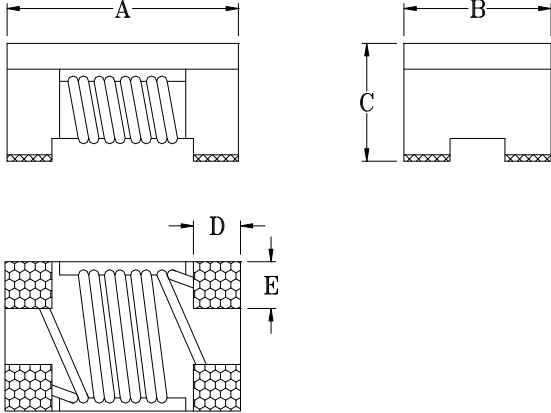


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE	SPEC NO.	SP-0191226001
ITEM	JPWC 0603-121 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.60	±0.10
	B	0.85	±0.10
	C	1.10	±0.10
	D	0.33	REF.
	E	0.25	REF.

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.																					
<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 30%;">IMPEDANCE</td> <td style="width: 20%; text-align: center;">120 ± 25%</td> <td style="width: 10%; text-align: center;">Ω</td> </tr> <tr> <td>TEST FREQUENCY</td> <td style="text-align: center;">100</td> <td style="text-align: center;">MHz</td> </tr> <tr> <td>RDC</td> <td style="text-align: center;">0.175 (max)</td> <td style="text-align: center;">Ω</td> </tr> <tr> <td>IDC</td> <td style="text-align: center;">500 (max)</td> <td style="text-align: center;">mA</td> </tr> <tr> <td>Rated Voltage</td> <td style="text-align: center;">50</td> <td style="text-align: center;">Vdc</td> </tr> <tr> <td>Withstanding Voltage</td> <td style="text-align: center;">125</td> <td style="text-align: center;">Vdc</td> </tr> <tr> <td>Insulation Resistance</td> <td style="text-align: center;">10 (min)</td> <td style="text-align: center;">MΩ</td> </tr> </table>	IMPEDANCE	120 ± 25%	Ω	TEST FREQUENCY	100	MHz	RDC	0.175 (max)	Ω	IDC	500 (max)	mA	Rated Voltage	50	Vdc	Withstanding Voltage	125	Vdc	Insulation Resistance	10 (min)	MΩ	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
IMPEDANCE	120 ± 25%	Ω																				
TEST FREQUENCY	100	MHz																				
RDC	0.175 (max)	Ω																				
IDC	500 (max)	mA																				
Rated Voltage	50	Vdc																				
Withstanding Voltage	125	Vdc																				
Insulation Resistance	10 (min)	MΩ																				

REMARK :

. Operating temperature range -40°C to + 85°C

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			