

SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE	SPEC NO.	SP-061002133
ITEM	JPWC 0805-361 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.	
	A	2.00	±0.2	
	B	1.20	±0.2	
	C	1.20	±0.2	
	D	0.45	±0.1	
	E	0.40	±0.1	

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	360 ± 25% Ω	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer <input type="checkbox"/> Agilent 4287A RF LCR Meter <input type="checkbox"/> AGILENT 4285A Precision L.C.R. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter <input type="checkbox"/> ZENTECH 502AC Resistance Merter <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter <input checked="" type="checkbox"/> WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100 MHz	
RDC	0.40 (max) Ω	
IDC	300 (max) mA	
Rated Voltage	50 (max) Vdc	
Withstanding Voltage	125 (max) Vdc	
Insulation Resistance	10 (min) MΩ	


REMARK :
 . Operating temperature -40~+125°C (Including self - temperature rise)

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN

TEST REPORT

SPEC NO : SP-061002133

Typical Impedance v.s. Frequency Curve

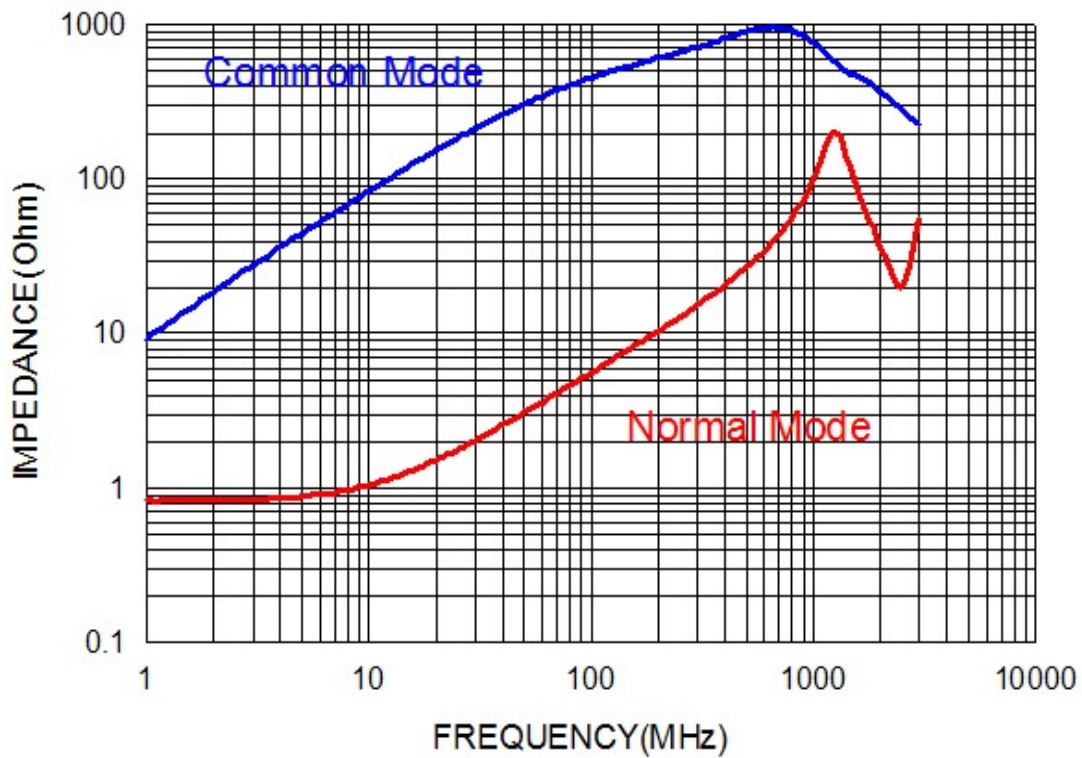

Check by :

姜秀琴

Test by :

陳秀月