

# SPECIFICATION FOR APPROVAL

COMMODITY	<b>COMMON MODE CHOKE</b>	SPEC NO.	SP-061002139
ITEM	<b>JPWC 1206-261</b> <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	3.20	±0.2
	B	1.60	±0.2
	C	1.90	±0.2
	D	0.60	±0.1
	E	0.60	±0.1

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	260 ± 25% Ω		<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.
TEST FREQUENCY	100 MHz		<input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.
RDC	0.50 (max) Ω		<input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.
IDC	300 (max) mA		<input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.
Rated Voltage	50 (max) Vdc		<input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.
Withstanding Voltage	125 (max) Vdc		<input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
Insulation Resistance	10 (min) MΩ		


**REMARK :**  
 . Operating temperature -40~+125°C (Including self - temperature rise)

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN

# TEST REPORT

SPEC NO : SP-061002139

Typical Impedance v.s. Frequency Curve

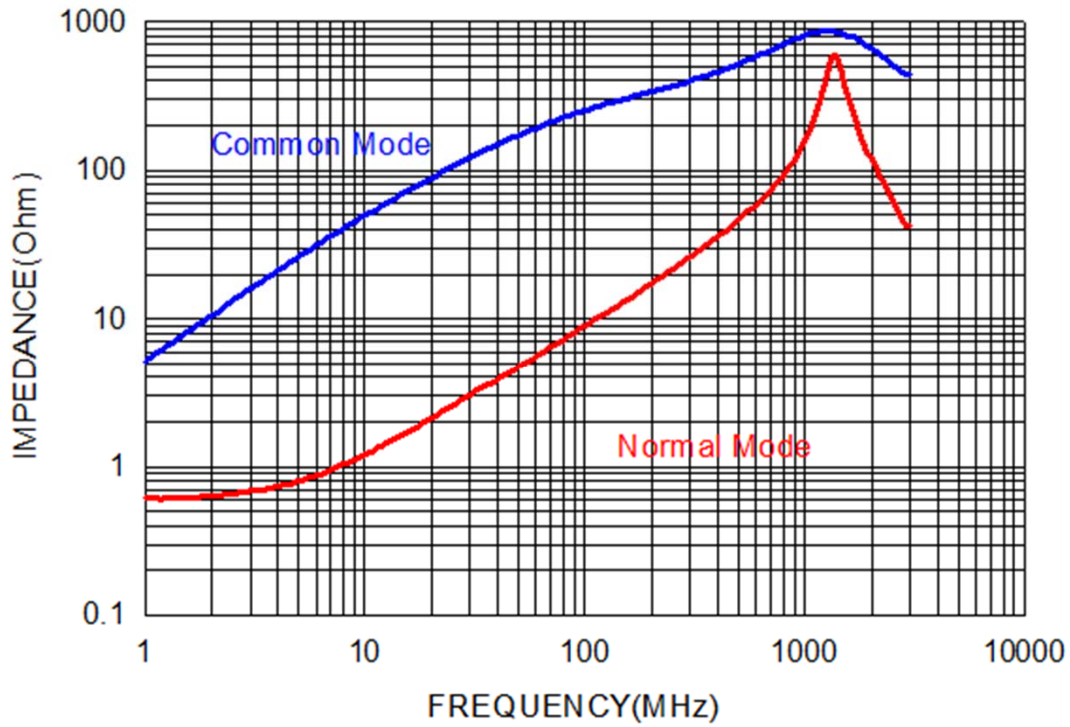

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260  
E-mail : jantek@jantek-elec.com.tw  
Web-Site : www.jantek-elec.com.tw