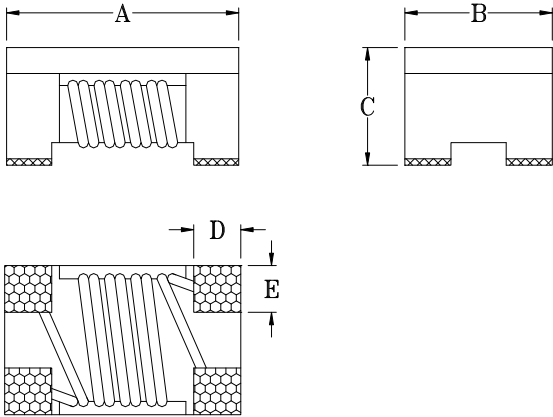


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE		SPEC NO.	SP-061002136
ITEM	JPWC 1206-102	Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	3.20	±0.2
	B	1.60	±0.2
	C	1.90	±0.2
	D	0.60	±0.1
	E	0.60	±0.1

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	1000 ± 25%	Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	MHz	
RDC	1.00 (max)	Ω	
IDC	200 (max)	mA	
Rated Voltage	50 (max)	Vdc	
Withstanding Voltage	125 (max)	Vdc	
Insulation Resistance	10 (min)	MΩ	

REMARK :


. Operating temperature -40~+125℃ (Including self - temperature rise)

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-061002136

Typical Impedance v.s. Frequency Curve

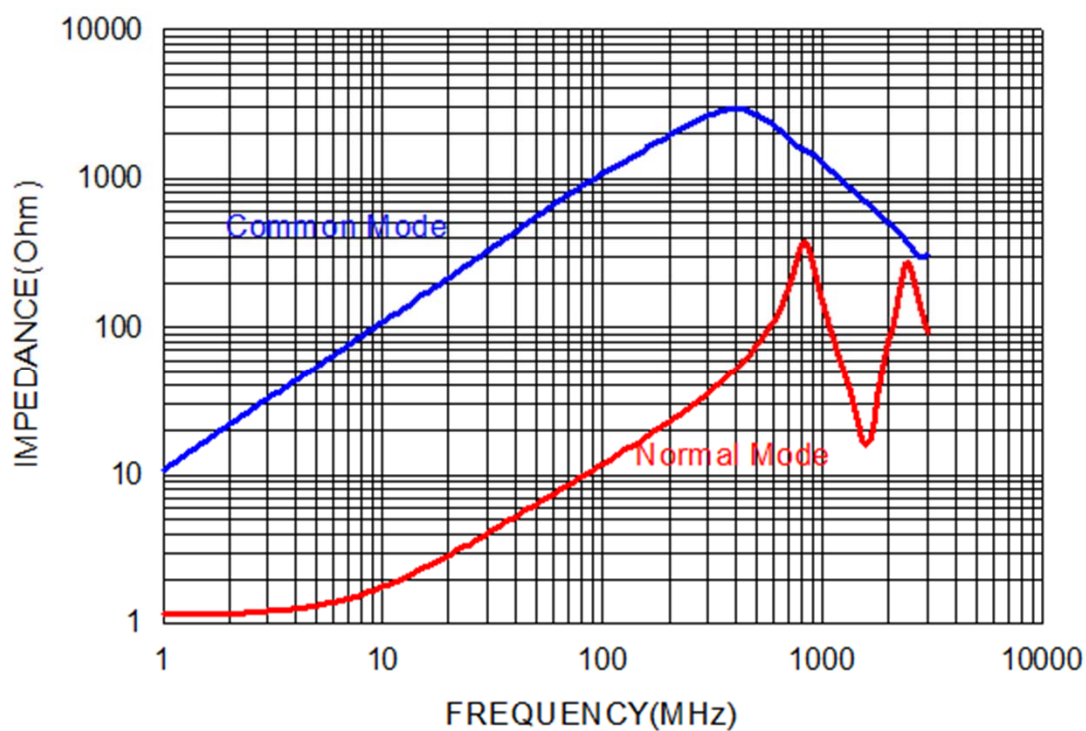

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw