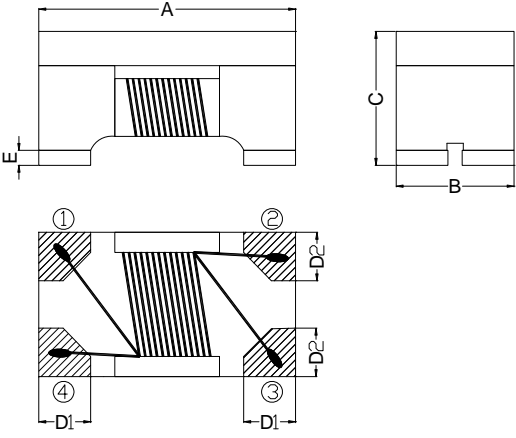


# SPECIFICATION FOR APPROVAL

COMMODITY	<b>COMMON MODE CHOKE</b>	SPEC NO.	SP-0210225003
ITEM	<b>JPWC 1210-900/1</b> <span style="border: 1px solid black; padding: 2px; font-size: 8px;">Green</span>	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.	
	A	3.20	±0.20	
	B	2.50	±0.20	
	C	2.20	±0.20	
	D1	0.80	±0.10	
	D2	0.90	±0.10	
	E	0.15	±0.10	

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	90 ± 25%	Ω	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	MHz	
DC RESISTANCE	0.05 (max)	Ω	
RATED CURRENT	1000 (max)	mA	
RATED VOLT.	50 (max)	Vdc	
WITHSTAND VOLT.	125 (max)	Vdc	
IR	10 (min)	MΩ	

**REMARK :**


1. Operating temperature range : - 40°C to + 125°C (Including self temp. rise)
2. Storage temperature range : - 40°C to + 125°C (on board)

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

# TEST REPORT

SPEC NO : SP-0210225003

Typical Impedance v.s. Frequency Curve

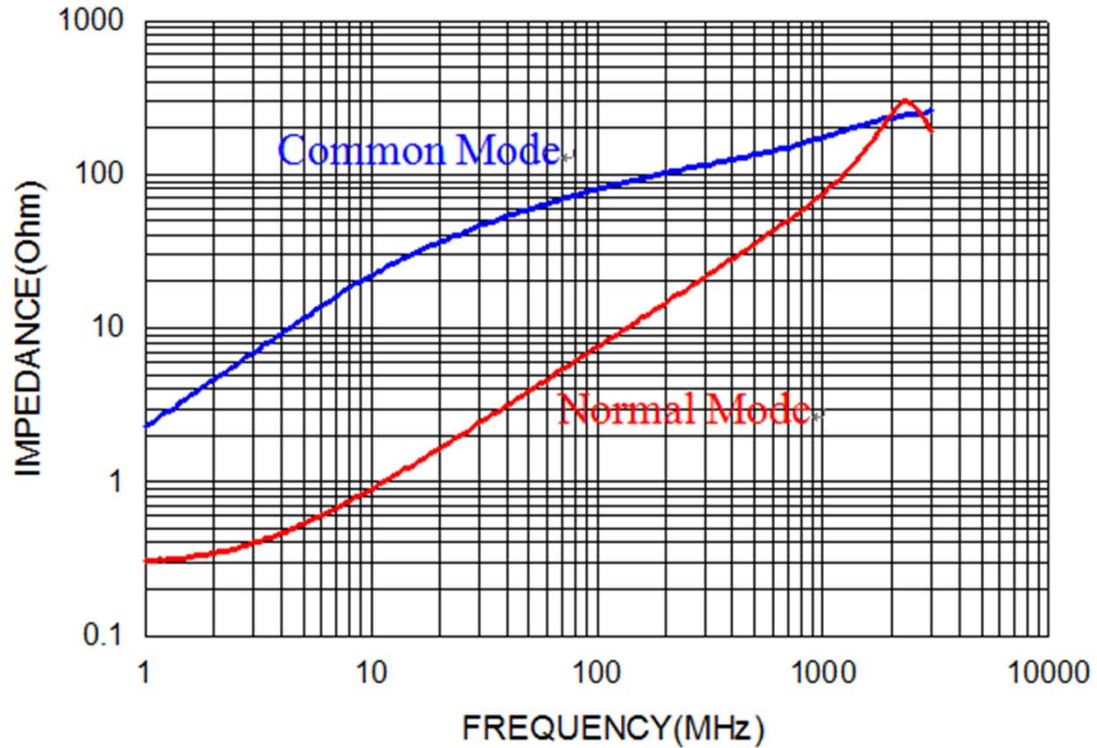

Check by :



Test by :

