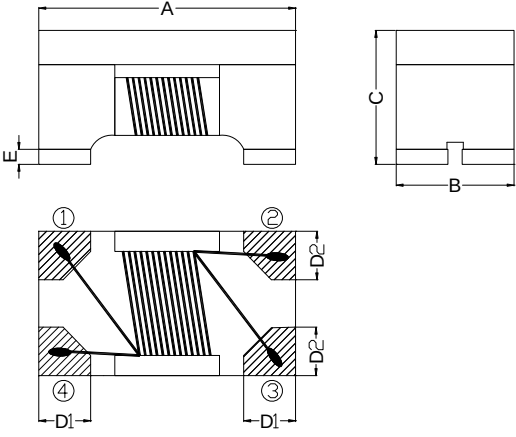


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE		SPEC NO.	SP-0210225002
ITEM	JPWC 1210-102/0.4	Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	3.20	±0.20
	B	2.50	±0.20
	C	2.20	±0.20
	D1	0.80	±0.10
	D2	0.90	±0.10
	E	0.15	±0.10

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	1000 ± 25%	Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	MHz	
DC RESISTANCE	0.30 (max)	Ω	
RATED CURRENT	400 (max)	mA	
RATED VOLT.	50 (max)	Vdc	
WITHSTAND VOLT.	125 (max)	Vdc	
IR	10 (min)	MΩ	

REMARK :


- Operating temperature range : - 40℃ to + 125℃ (Including self temp. rise)
- Storage temperature range : - 40℃ to + 125℃ (on board)

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0210225002

Typical Impedance v.s. Frequency Curve

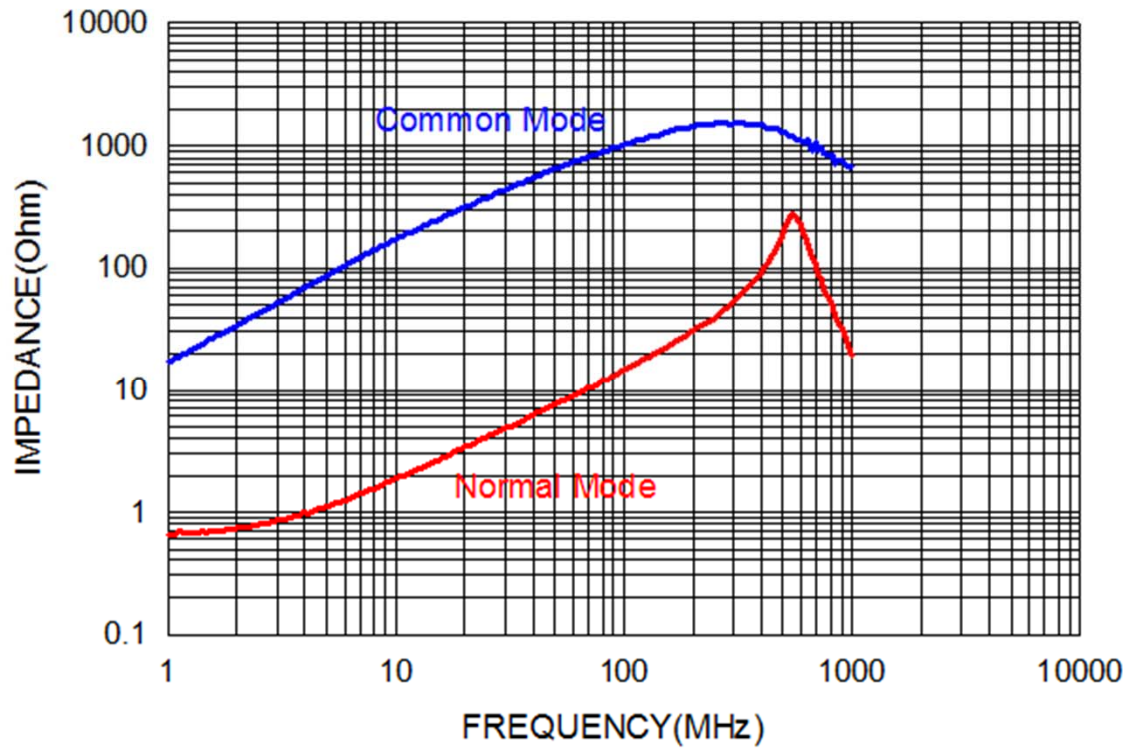

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw