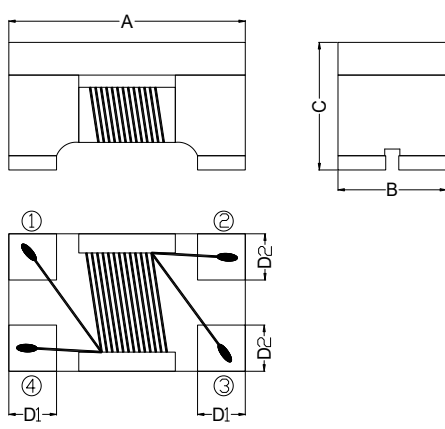


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE	SPEC NO.	SP-0210302007
ITEM	JPWC 1812-901/2.3 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.	
	A	4.50	±0.20	
	B	3.20	±0.20	
	C	2.80	±0.20	
	D1	0.90	±0.15	
	D2	1.05	±0.15	

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	650 (min) Ω 900 (typ.)	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.
TEST FREQUENCY	100 MHz	<input type="checkbox"/> AGILENT 4285A Precision L.C.R. <input type="checkbox"/> HP-4286A RF L.C.R. Meter.
DC RESISTANCE	0.07 (max) Ω	<input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.
RATED CURRENT	2300 (max) mA	<input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.
RATED VOLT.	50 (max) Vdc	<input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.
WITHSTAND VOLT.	125 (max) Vdc	<input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.
IR	10 (min) MΩ	

REMARK :

1. Operating temperature range : - 40°C to + 125°C (Including self temp. rise)
2. Storage temperature range : - 40°C to + 125°C (on board)


PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			



TEST REPORT

SPEC NO : SP-0210302007

Typical Impedance v.s. Frequency Curve

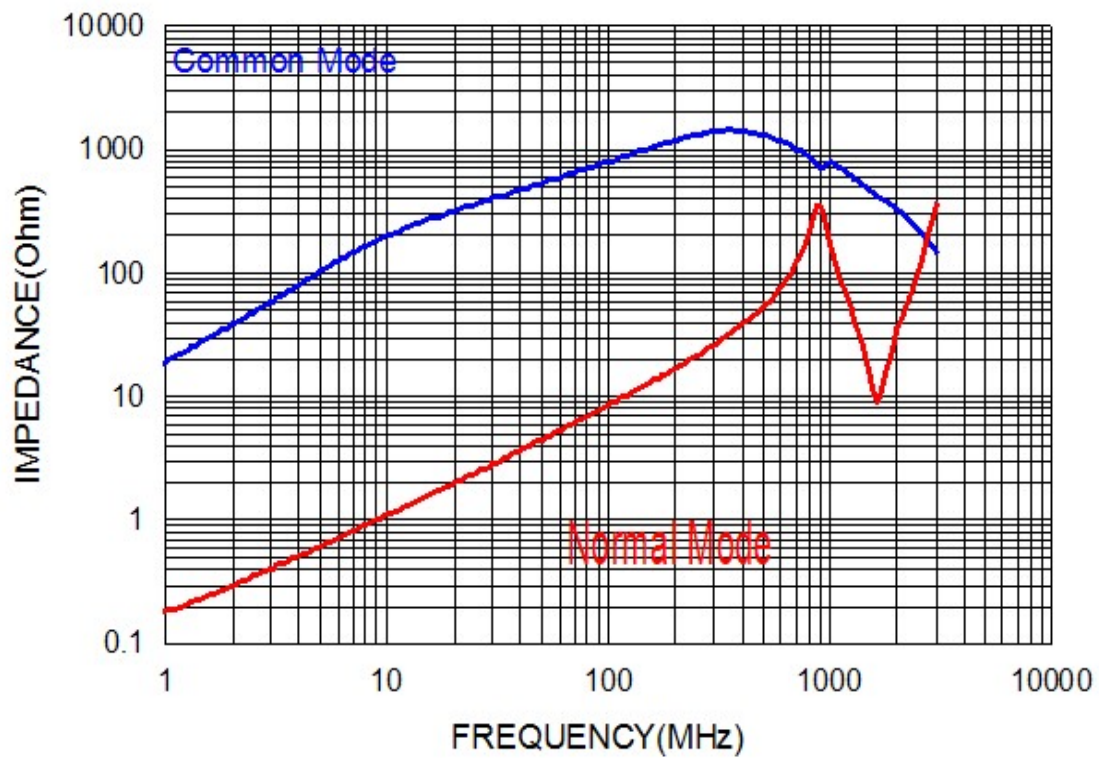

Check by :

姜秀琴

Test by :

陳秀月