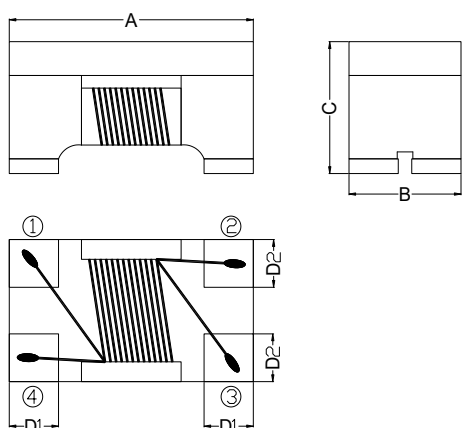


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE FILTER CHOKE	SPEC NO.	SP-0190729004
ITEM	JPWC 1812V-901/2.3 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	4.50 ±0.20
		B	3.20 ±0.20
		C	2.80 ±0.20
		D1	0.90 ±0.15
		D2	1.05 ±0.15

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	650 (min) Ω 900 (typ.)	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100 MHz	
DC RESISTANCE	0.07 (max) Ω	
RATED CURRENT	2300 (max) mA	
RATED VOLT.	50 (max) Vdc	
WITHSTAND VOLT.	125 (max) Vdc	
IR	10 (min) M Ω	


REMARK :
1. Operating temperature range : - 55°C to + 125°C (Including self temp. rise)
2. Storage temperature range : - 55°C to + 125°C (on board)
3. Compatible with AEC-Q200

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0190729004

Typical Impedance v.s. Frequency Curve

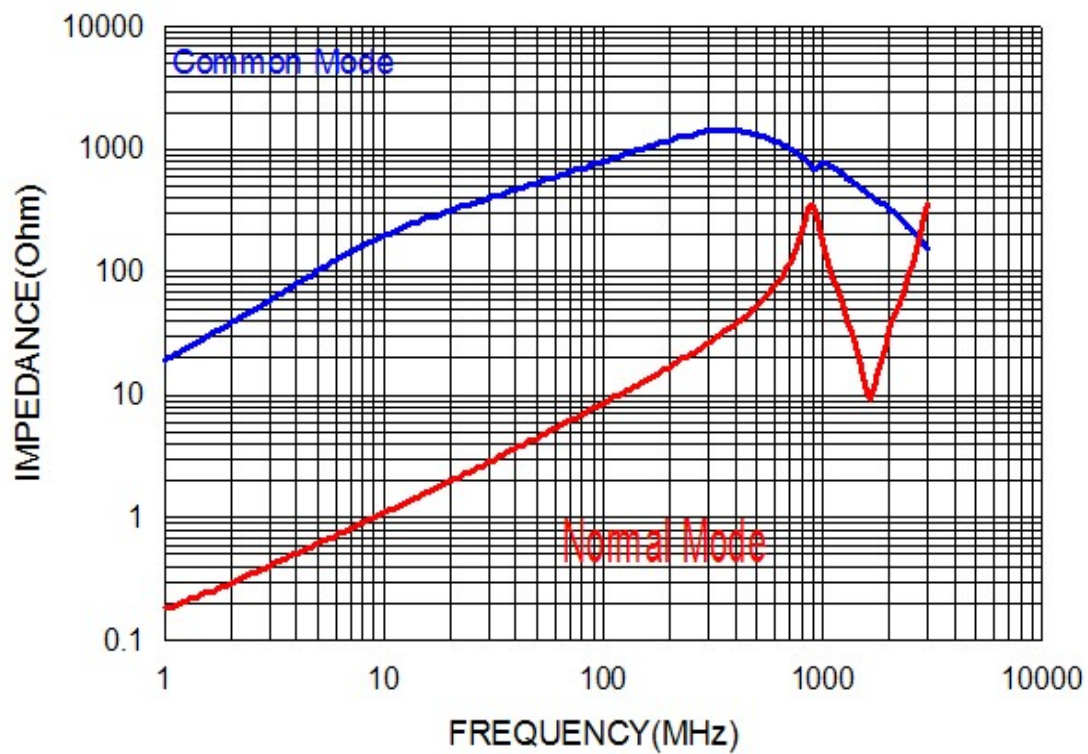

Check by :

姜秀琴

Test by :

陳秀月