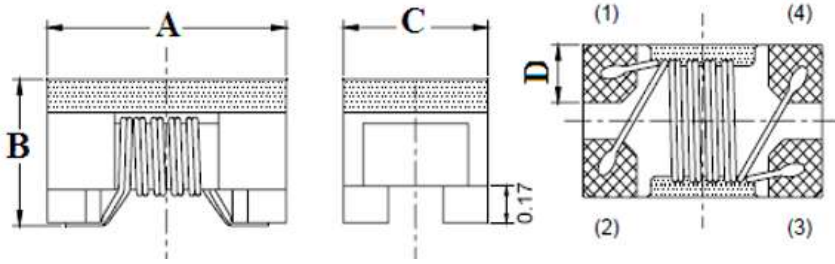


SPECIFICATION FOR APPROVAL

COMMODITY	SMD BALUN X'FMR Type	SPEC NO.	SP-0230220005
ITEM	JPWB 2012-005 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	2.00	± 0.20
	B	1.20	± 0.20
	C	1.20	± 0.20
	D	0.45	typ.

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
UB/B Impedance	50/50 (Ω)	☐ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☒ WAYNE KERR HI-POT TESTER 7600
Insulation	10 (min) (MΩ)	
Withstand Voltage	125 (dcv)	
RDC	0.35 (max) (Ω)	
Rated Voltage	50 (dcv)	
Rated Current	330 (mA)	
Freq. Range	400MHz To 1.8GHz	
Insulation Loss at Freq. Range	2.2 (max)	

REMARK :

Operating Temperature Range: -40℃ ~ +125℃

PURCHASER CONFIRMED :

APPROVED	CHECKED	DRAWN
		