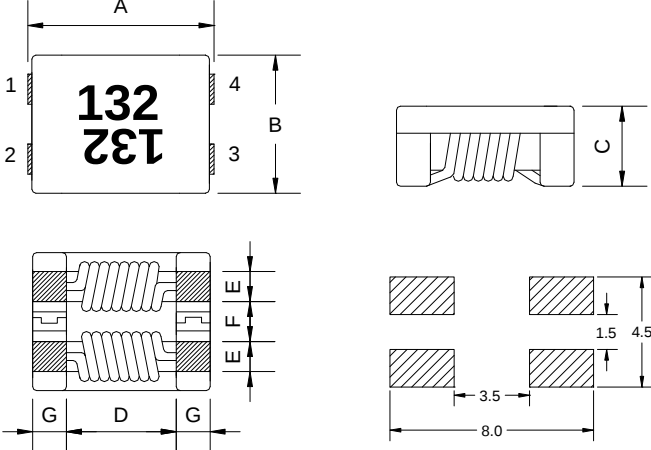


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE FILTER CHOKE	SPEC NO.	SP-0181004003
ITEM	JSCM 0706V-132 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	7.0	±0.5
	B	6.0	±0.5
	C	3.8	MAX.
	D	3.5	TYP.
	E	1.5	±0.5
	F	1.5	±0.5
	G	1.7	±0.5

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	910 (min.) Ω 1300 (typ.)	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100 MHz	
RDC (1 line)	20 (max.) m Ω	
Rated Current	3 (max.) A	
Rated Volt.	80 (max) Vdc	
Insulation Resistance	10 (min) M Ω	

REMARK :


- Operating temperature range : - 40°C to + 125°C (Including self temp. rise)
- Storage temperature range : -40~+125°C (on board)
- Marking : Laser Marking
- Compatible with AEC-Q200

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0181004003

Typical Impedance v.s. Frequency Curve

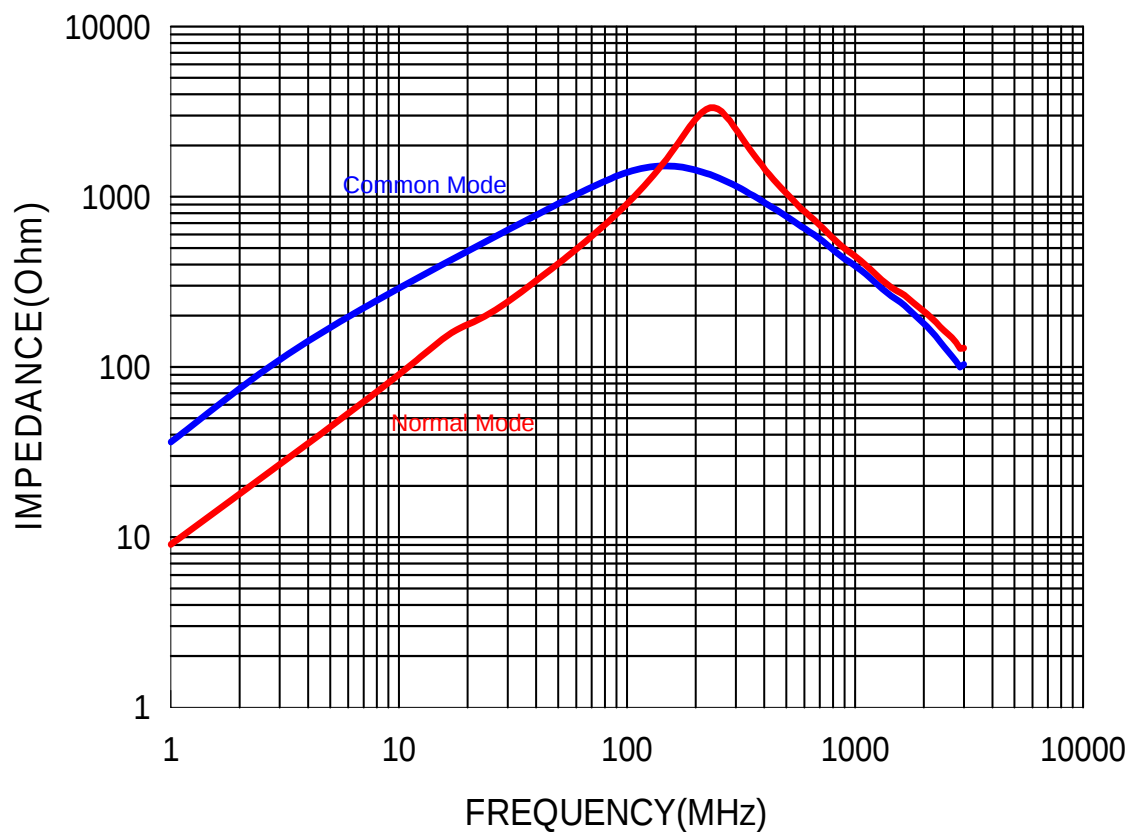

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw