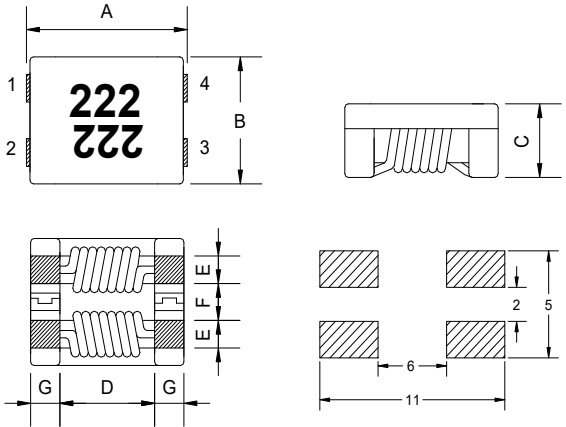


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE FILTER CHOKE	SPEC NO.	SP-0221014009
ITEM	JSCM 0907V-222 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	9.0	±0.5
	B	7.0	±0.5
	C	4.5	MAX.
	D	5.3	TYP.
	E	1.5	±0.5
	F	2.1	±0.5
	G	1.8	±0.5

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE	1700 (min.) Ω 2200 (typ.)	☒ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☒ WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100 MHz	
RDC (1 line)	25 (max.) m Ω	
Rated Current	4 (max.) A	
Rated Volt.	80 (max) Vdc	
Insulation Resistance	10 (min) M Ω	

REMARK :


- Operating temperature range : - 40°C to + 125°C (Including self temp. rise)
- Storage temperature range : -40~+125°C (on board)
- Marking : Laser Marking
- Compatible with AEC-Q200

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0221014009

Typical Impedance v.s. Frequency Curve

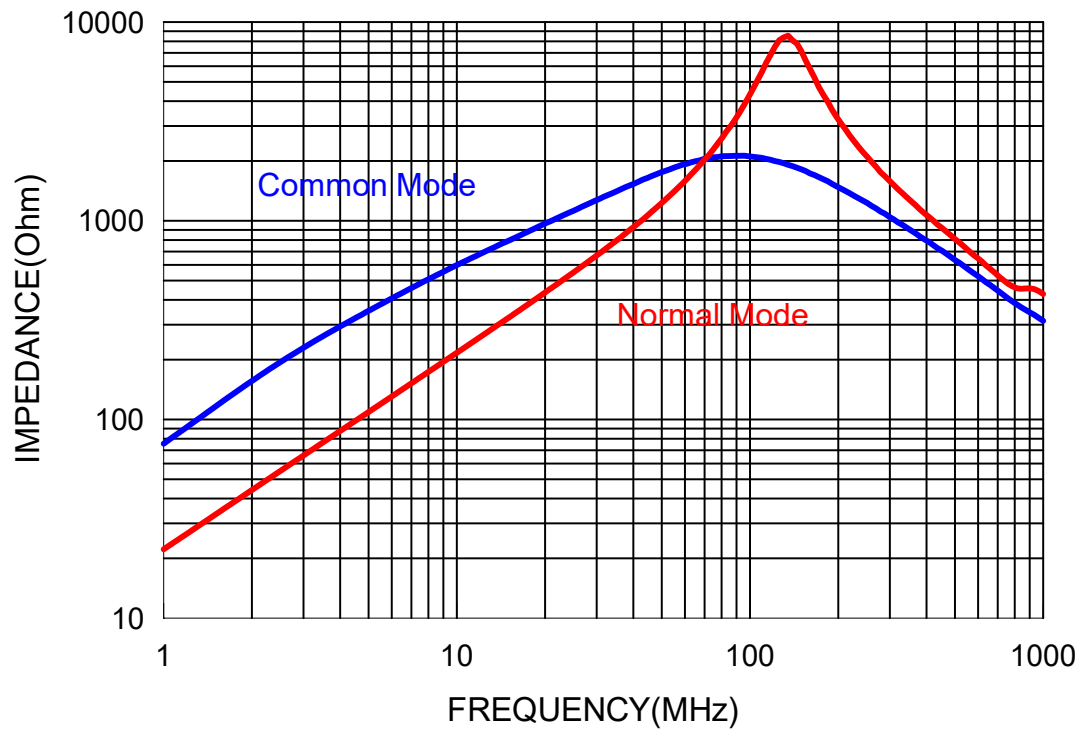

Check by :

姜秀琴

Test by :

陳秀月