

SPECIFICATION FOR APPROVAL

COMMODITY	FERRITE BEADS	SPEC NO.	SP-060927087
ITEM	FDB 3.5×6.0×0.8 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	3.50 ±0.2
		B	6.00 ±0.4
		C	0.60 ±0.05
		D	23.50 ±1.0
		H	7.50 MAX.
		P	5.00 ±0.5

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
IMPEDANCE at Z 1	90 (min) Ω	☒ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
IMPEDANCE at Z 2	150 (min) Ω	
TEST FREQUENCY at Z 1	25 MHz	
TEST FREQUENCY at Z 2	100 MHz	
IDC	6 (max) A	


REMARK :

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN

TEST REPORT

SPEC NO : SP-060927087

Typical Impedance v.s. Frequency Curve

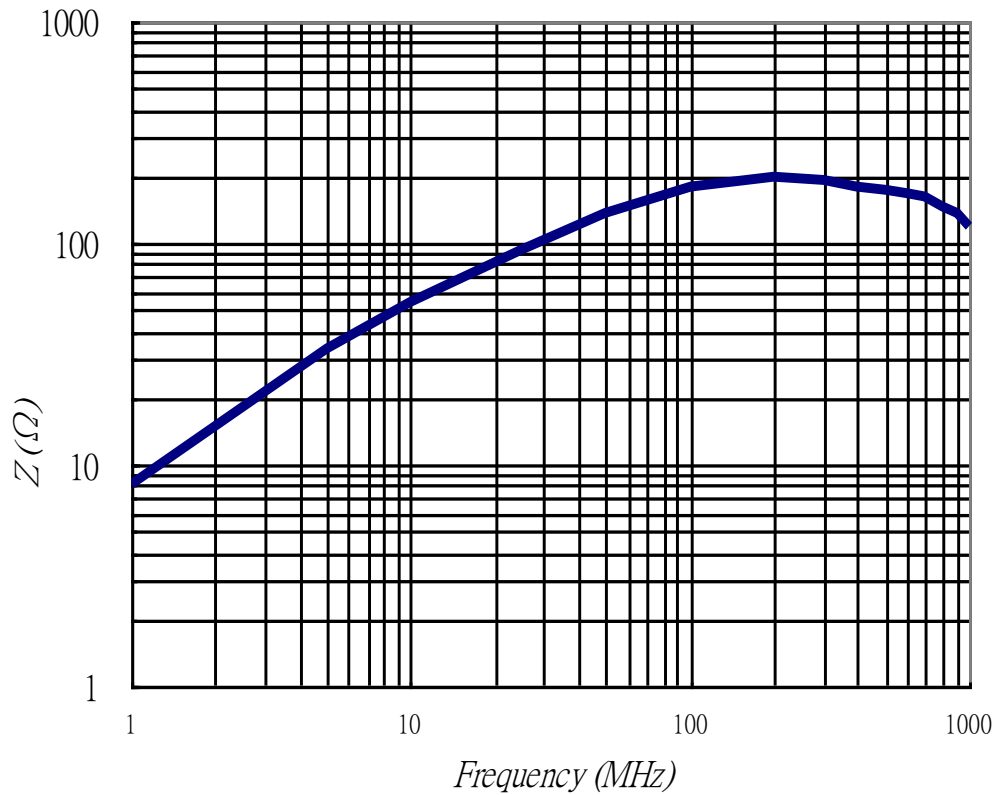

Test Instrument :

HP-4286A RF L.C.R. Meter.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

