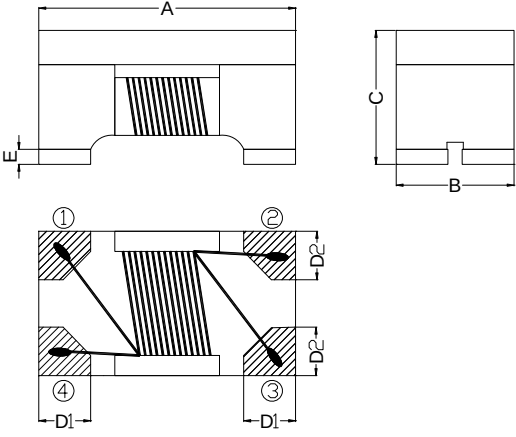


SPECIFICATION FOR APPROVAL

COMMODITY	COMMON MODE CHOKE	SPEC NO.	SP-0181009007
ITEM	JPWC 0805V-221 Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	2.00	±0.20
	B	1.20	±0.20
	C	1.20	±0.20
	D1	0.50	±0.10
	D2	0.51	±0.10
	E	0.15	±0.10

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
IMPEDANCE	220 ± 25%	Ω	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	MHz	
RDC	0.40	(max) Ω	
Rated Current	300	(max) mA	
Rated Volt.	50	(max) Vdc	
Withstand Volt.	125	(max) Vdc	
Insulation Resistance	10	(min) MΩ	

REMARK :


- Operating temperature range : - 55℃ to + 125℃ (Including self temp. rise)
- Storage temperature range : - 55℃ to + 125℃ (on board)
- Compatible with AEC-Q200

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0181009007

Typical Impedance v.s. Frequency Curve

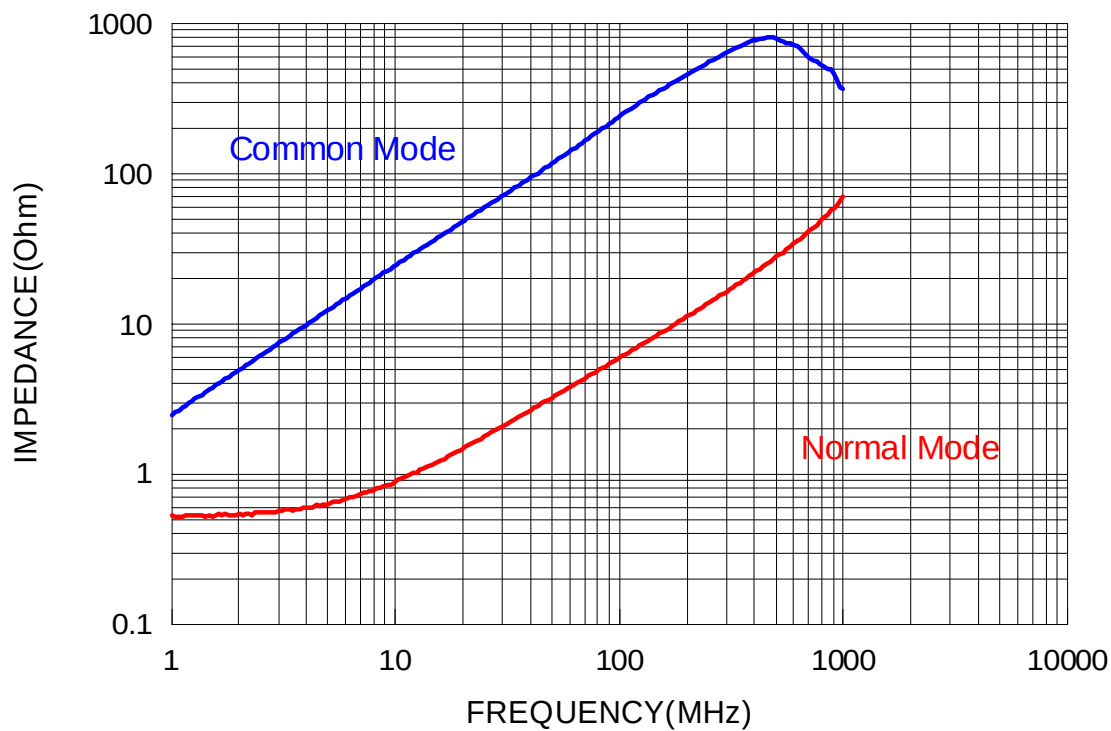

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw