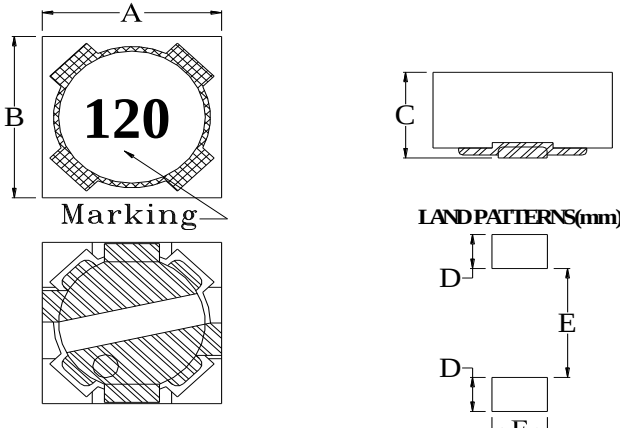


# SPECIFICATION FOR APPROVAL

|           |                                                                                    |          |                |
|-----------|------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                     | SPEC NO. | SP-0230420002  |
| ITEM      | JPRH 0703-120M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |  | DIM. | TOL.     |
|-----------------------------------------------------------------------------------|--|------|----------|
|  |  | A    | 7.3 ±0.2 |
|                                                                                   |  | B    | 7.3 ±0.2 |
|                                                                                   |  | C    | 3.2 ±0.2 |
|                                                                                   |  | D    | 1.5 REF. |
|                                                                                   |  | E    | 4.8 REF. |
|                                                                                   |  | F    | 2.2 REF. |
|                                                                                   |  |      |          |
|                                                                                   |  |      |          |
|                                                                                   |  |      |          |
|                                                                                   |  |      |          |

| (2) ELECTRICAL CHARACTERISTIC |            |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------|------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 12 ± 20%   | μ H | <input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 1          | KHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| TEST VOLT                     | 0.25       | V   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| RDC                           | 98 (max)   | mΩ  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| IDC                           | 1.52 (max) | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               |            |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               |            |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## REMARK :

1. Inductance drop = 25% typ at IDC
2. ΔT = 40°C rise typ at IDC

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |