




FEATURES

- ◆ JCB series offer full specification for your choices.
- Wide impedance characteristic and several size support you easy to design

APPLICATIONS

- ◆ Communications
- ◆ Computer products, etc....
- ◆ VCR and cameras
- ◆ Noise suppression in digital equipments

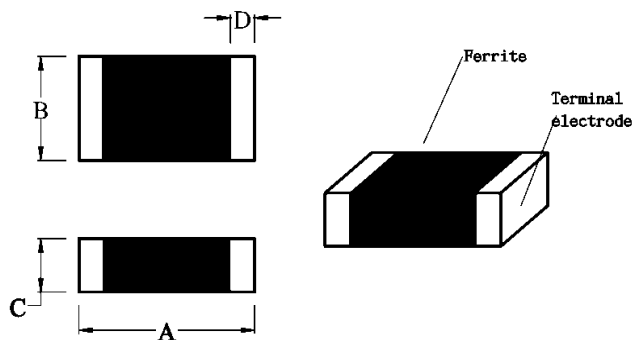

DIMENSIONS (mm)

Part No.	Size (mm)			
	A	B	C	D
JCB 060303 (0201)	0.6 ± 0.03	0.3 ± 0.03	0.3 ± 0.03	$0.1 \sim 0.2$


No.	Part No.	Impedance (Ω)	Test Frequency (MHz)	RDC (Ω) (MAX)	IDC (mA) (MAX)
1	JCB 060303-100	$10 \pm 25\%$	100	0.10	500
2	JCB 060303-300	$30 \pm 25\%$	100	0.30	300
3	JCB 060303-400	$40 \pm 25\%$	100	0.30	300
4	JCB 060303-500	$50 \pm 25\%$	100	0.30	300
5	JCB 060303-600	$60 \pm 25\%$	100	0.35	300
6	JCB 060303-700	$70 \pm 25\%$	100	0.35	300
7	JCB 060303-800	$80 \pm 25\%$	100	0.35	300
8	JCB 060303-101	$100 \pm 25\%$	100	0.40	200
9	JCB 060303-121	$120 \pm 25\%$	100	0.45	200
10	JCB 060303-151	$150 \pm 25\%$	100	0.50	200
11	JCB 060303-181	$180 \pm 25\%$	100	0.60	200
12	JCB 060303-221	$220 \pm 25\%$	100	0.75	200
13	JCB 060303-241	$240 \pm 25\%$	100	0.80	200
14	JCB 060303-301	$300 \pm 25\%$	100	0.90	150
15	JCB 060303-331	$330 \pm 25\%$	100	0.90	150
16	JCB 060303-471	$470 \pm 25\%$	100	1.50	100
17	JCB 060303-601	$600 \pm 25\%$	100	1.50	100
18	JCB 060303-102	$1000 \pm 25\%$	100	2.50	100

PACKAGE

Type	JCB060303
Q'TY/Reel	15000


Packaging Information

• Reel Dimension

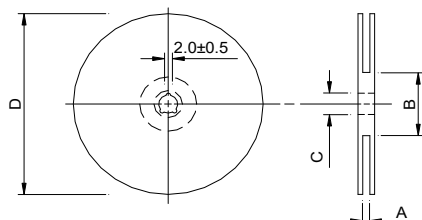

A(mm)	B(mm)	C(mm)	D(mm)
10±1.5	50 min.	13±0.8	178±2

• Tape Dimension

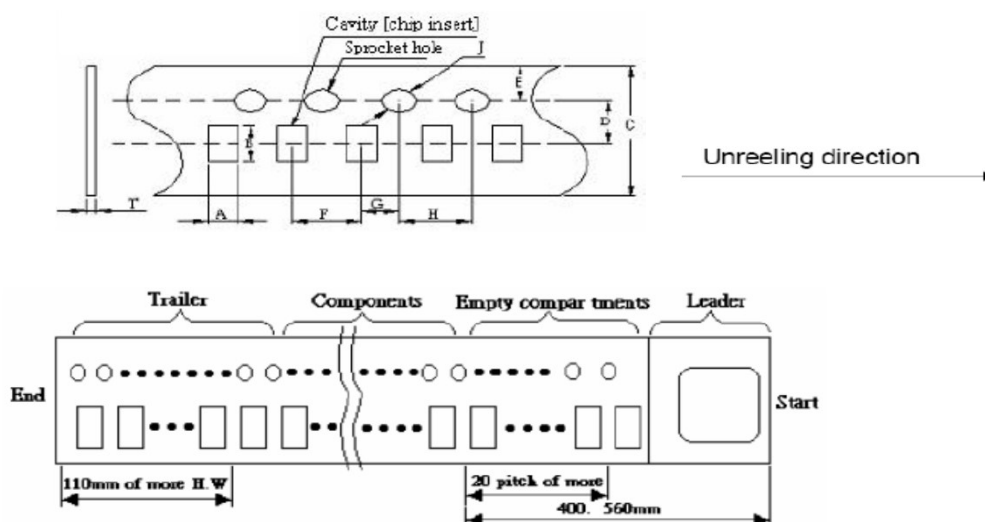


A(mm)	B(mm)	C(mm)	D(mm)	E(mm)	F(mm)	G(mm)	H(mm)	J(mm)	T(mm)
0.38±0.04	0.68±0.04	8.00±0.20	3.50±0.05	1.75±0.10	2.00±0.05	2.00±0.05	4.00±0.10	1.5±0.1/-0	1.10 MAX.

• Packaging Quantity

Size	Reel
JCB 060303	15000

• Tearing Off Force

The force for tearing off cover tape is 10 to 100 grams in the arrow direction under the following conditions (referenced ANSI/EIA-481-D-2008 of 4.11 standard).

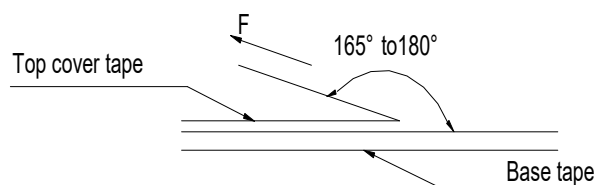

Tearing Speed mm	Room Temp (°C)	Room Humidity (%)	Room atm (hPa)
300±10%	5~35	45~85	860~1060

■ Application Notice

• STORAGE

1. The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to high humidity. Packages must be stored at 40°C or less and 70% RH or less.
2. The solderability of the external electrode may be deteriorated if packages are stored where they are exposed to dust or harmful gas (hydrogen chloride, sulfurous acid gas or hydrogen sulfide).
3. Packaging material may be deformed if packages are stored where they are exposed to heat or direct sun — light.
4. Minimum packages, such as polyvinyl heat — seal packages shall not be opened until just before they are used. If opened, use the reels as soon as possible.
5. Recommended products should be used within 6 months from the time of delivery. For those parts which passed more than 6 months shall be checked solderability before it is used.

• Transportation

Care should be taken when transporting or handling product to avoid excessive vibration or mechanical shock.