

# SPECIFICATION FOR APPROVAL

|           |                                                                                     |          |                |
|-----------|-------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                      | SPEC NO. | SP-0190211016  |
| ITEM      | JRPI 0518M-150M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm) |  |   | DIM. | TOL.  |
|---------------------------|--|---|------|-------|
|                           |  | A | 5.7  | ± 0.3 |
|                           |  | B | 5.2  | ± 0.2 |
|                           |  | C | 1.6  | ± 0.2 |
|                           |  | D | 1.1  | ± 0.3 |
|                           |  | E | 2.5  | ± 0.3 |
|                           |  |   |      |       |
|                           |  |   |      |       |
|                           |  |   |      |       |
|                           |  |   |      |       |
|                           |  |   |      |       |

| (2) ELECTRICAL CHARACTERISTIC |                             |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|-------------------------------|-----------------------------|-----|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 15 ± 20%                    | μ H | <input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer.<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer.<br><input type="checkbox"/> ZENTECH 101 L.C.R. Meter.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter.<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter. |
| TEST FREQUENCY                | 100                         | KHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| TEST VOLT                     | 1                           | V   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| RDC                           | 275.0 (typ.)<br>318.0 (max) | mΩ  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Isat                          | 2.3 (typ.)                  | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
| Irms                          | 1.7 (typ.)                  | A   |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|                               |                             |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |

## REMARK :

1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C


| PURCHASER CONFIRMED | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|---------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                     |  |  |  |

# TEST REPORT

SPEC NO : SP-0190211016

## Typical Performance Curves

JRPI 0518M-150

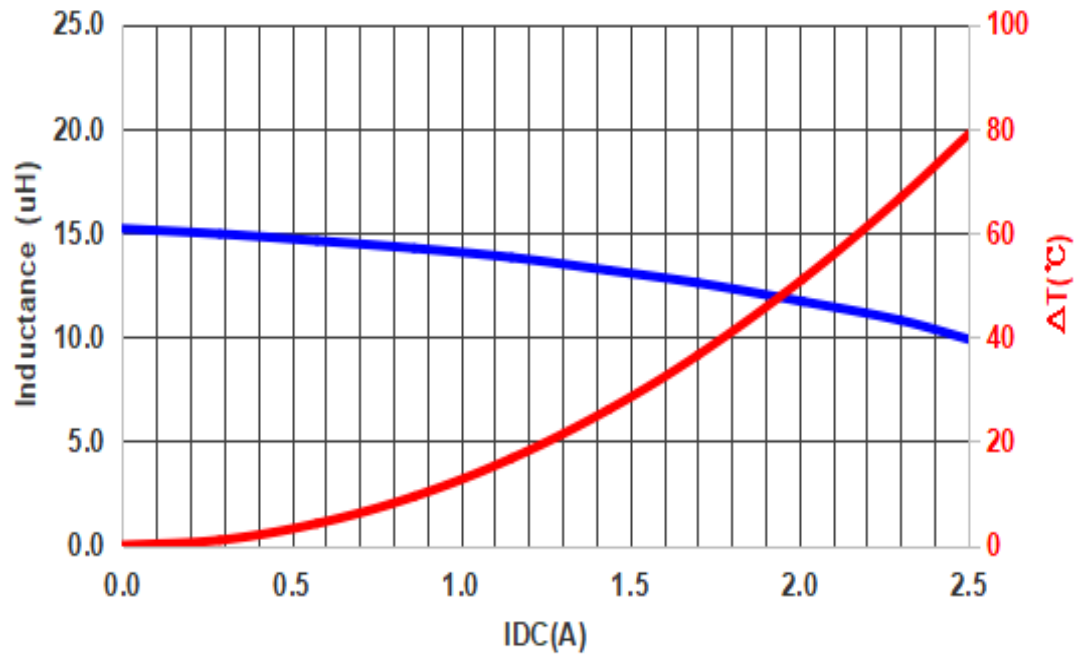

### Test Instrument :

ZENTECH 3302 Automatic Components Analyzer

ZENTECH 1320 BIAS CURRENT

### Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260

E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw