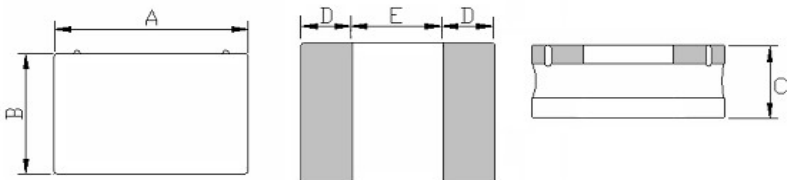


# SPECIFICATION FOR APPROVAL

|           |                                                                                      |          |                |
|-----------|--------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                       | SPEC NO. | SP-0131204024  |
| ITEM      | JNR 252012U-3R3M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |  | DIM. | TOL.              |
|-----------------------------------------------------------------------------------|--|------|-------------------|
|  |  | A    | 2.50<br>-0.1/+0.2 |
|                                                                                   |  | B    | 2.00<br>-0.1/+0.2 |
|                                                                                   |  | C    | 1.20<br>Max.      |
|                                                                                   |  | D    | 0.85<br>± 0.20    |
|                                                                                   |  | E    | 0.80<br>± 0.20    |
|                                                                                   |  |      |                   |
|                                                                                   |  |      |                   |
|                                                                                   |  |      |                   |
|                                                                                   |  |      |                   |
|                                                                                   |  |      |                   |

| (2) ELECTRICAL CHARACTERISTIC |                                | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 3.3 ± 20%    μH                | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 1    MHz                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| TEST VOLT                     | 0.1    V                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| RDC                           | 0.120 ± 20%    Ω               |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Isat                          | 1.70 (typ.)<br>1.50 (max)    A |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| Irms                          | 1.45 (typ.)<br>1.30 (max)    A |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|                               |                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |

## REMARK :


1. Isat : Saturation Current (Isat) will cause L0 to drop approximately 30%
2. Irms : Heat Rated Current (Irms) will cause the coil temperature rise approximately Δt40℃
3. Rated DC current: The lower value of Irms and Isat.

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |

# TEST REPORT

SPEC NO : SP-0131204024

Typical Performance Curves

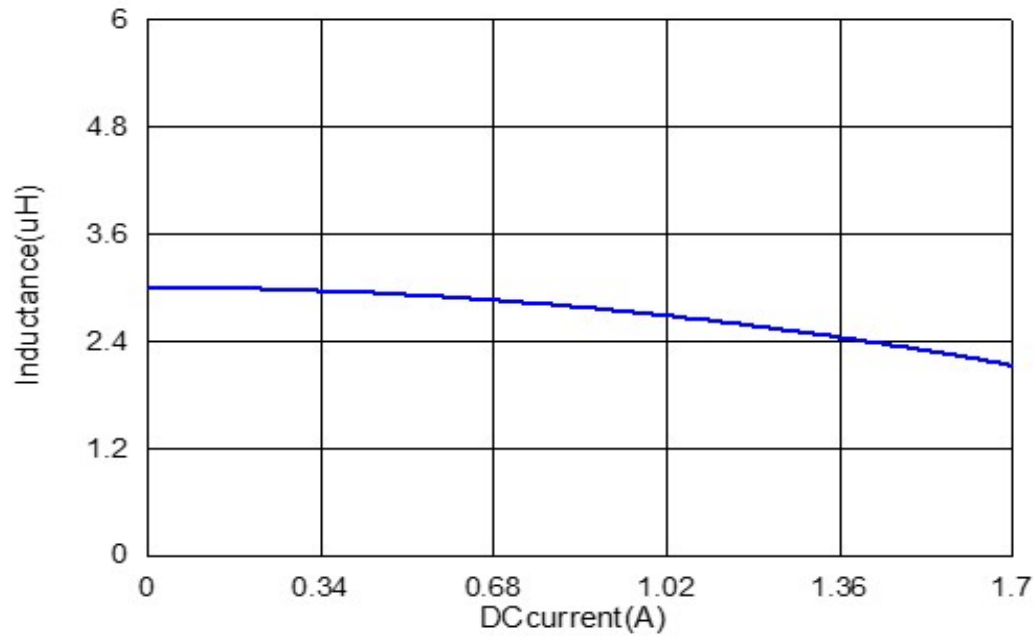

Test Instrument :

Chroma 3302 Automatic Components Analyzer.

ZENTECH 1320 BIAS CURRENT.

Testing Condition :

Temperature : 25 to 28°C

Humidity : 60 to 70 % RH

Check by :



Test by :

