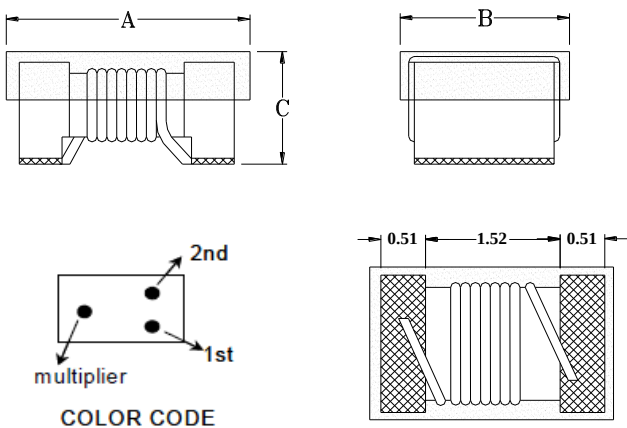


SPECIFICATION FOR APPROVAL

COMMODITY	HIGH FREQUENCY WOUND CHIP INDUCTOR	SPEC NO.	SP-0230314022
ITEM	JWI 1008HQ-82NJ Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)			DIM.	TOL.
 COLOR CODE		A	2.92	MAX.
		B	2.79	MAX.
		C	2.03	MAX.
		1st Figure	Gray	
		2nd Figure	Red	
		3rd Multiplier	Brown	

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	82 ± 5%	nH	☒ AGILENT 4294A Precision Impedance Analyzer ☒ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	50	MHz	
Q	80	(min)	
TEST FREQUENCY	350	MHz	
SRF	1.06	(min) GHz	
RDC	0.16	(max) mΩ	
Irms	1.1	(max) A	

REMARK :

OPERATING TEMPERATURE : -25℃ ~ + 125℃

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			