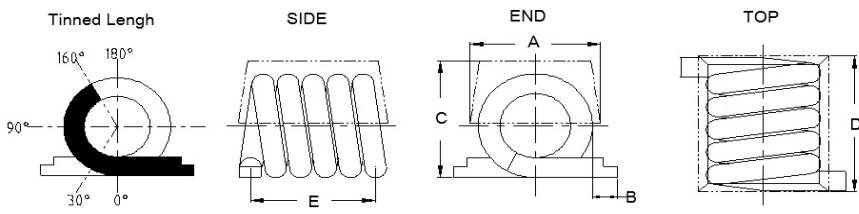


SPECIFICATION FOR APPROVAL

COMMODITY	SMD AIR WOUND COIL	SPEC NO.	SP-061002059
ITEM	JAS 292A-02K Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	1.42	±0.13
	B	0.89	±0.25
	C	1.37	±0.15
	D	2.21	±0.25
	E	1.83	±0.25

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	1.65 ± 10% nH	☐ AGILENT 4294A Precision Impedance Analyzer ☒ Agilent 4287A RF LCR Meter
Q	100 (min)	☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	800 MHz	☒ CHROMA 3302 Automatic Components Analyzer.
TEST VOLT	0.25 V	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
SRF	10 (min) GHz	☒ ZENTECH 1320 BIAS CURRENT.
RDC	4 (max) mΩ	☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter
IDC	1.6 (max) A	☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600

REMARK :

1. Operating temp. : -40°C to +125°C
2. For temperature rise : 15°C

PURCHASER CONFIRMED :

APPROVED	CHECKED	DRAWN
		