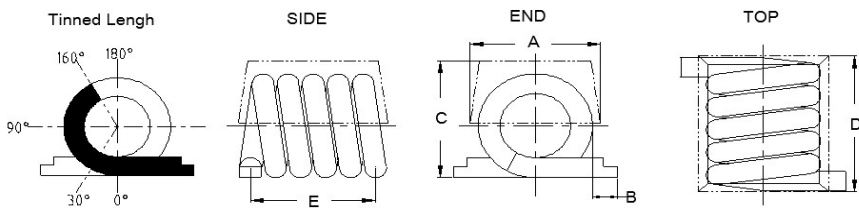


SPECIFICATION FOR APPROVAL

COMMODITY	SMD AIR WOUND COIL	SPEC NO.	SP-061002062
ITEM	JAS 292A-05J Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	1.42 ±0.13
		B	0.89 ±0.25
		C	1.37 ±0.15
		D	2.21 ±0.25
		E	1.83 ±0.25

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	5.45 ± 5%	nH	☐ AGILENT 4294A Precision Impedance Analyzer ☒ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
Q	100	(min)	
TEST FREQUENCY	800	MHz	
TEST VOLT	0.25	V	
SRF	7.0	(min) GHz	
RDC	8.0	(max) mΩ	
IDC	1.6	(max) A	

REMARK :

1. Operating temp. : -40°C to +125°C
2. For temperature rise : 15°C

PURCHASER CONFIRMED :

APPROVED	CHECKED	DRAWN
		