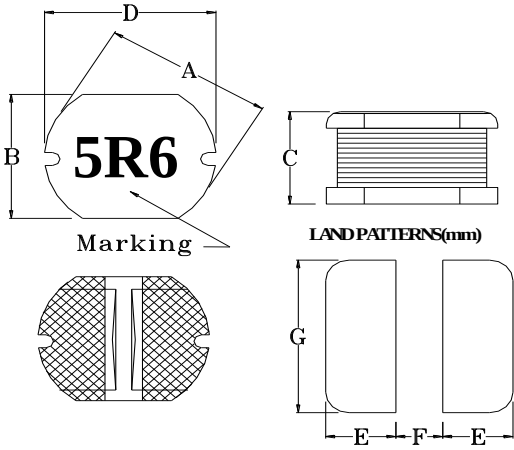


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060717022
ITEM	JTP 0403-5R6M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	4.5 ±0.3
		B	4.0 ±0.3
		C	3.2 ±0.3
		D	4.5 ±0.3
		E	1.8 REF.
		F	1.5 REF.
		G	4.5 REF.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	5.6 ± 20%	μ H	☒ AGILENT 4294A Precision Impedance Analyzer
TEST FREQUENCY	7.96	MHz	☒ Agilent 4287A RF LCR Meter
TEST VOLT	0.25	V	☐ AGILENT 4285A Precision L.C.R.
RDC	0.1257 (max)	Ω	☐ HP-4286A RF L.C.R. Meter.
IDC	0.99 (max)	A	☒ CHROMA 3302 Automatic Components Analyzer.
			☐ WAYNE KERR 6420 Precision Impedance Analyzer.
			☒ ZENTECH 1320 BIAS CURRENT.
			☒ BK PRECISION 2840 DC Resistance Meter
			☐ ZENTECH 502AC Resistance Merter
			☐ ADEX AX-1155B DC Low Ohm Meter
			☐ WAYNE KERR HI-POT TESTER 7600

REMARK :

. This indicates the value of current when the inductance is 10% lower than its initial value at D.C. superimposition or D.C. current when at t=40°C, whichever is lower. (Ta=20°C)

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			