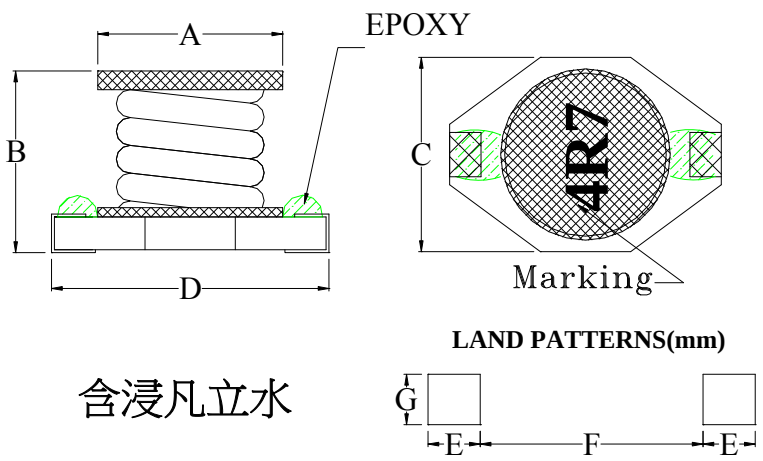


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802084
ITEM	JSPK 0804-4R7M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 含浸凡立水	A	9.0	Max.
	B	5.5	Max.
	C	9.5	Max.
	D	13.5	Max.
	E	2.92	REF.
	F	7.37	REF.
	G	2.79	REF.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	$4.7 \pm 20\%$	μH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100	KHz	
TEST VOLT	0.1	V	
RDC	18 (max)	mΩ	
Isat	5.4 (max)	A	
Irms	4.8 (max)	A	

REMARK :

1. Inductance drop = 10% typ.at Isat.
2. $\Delta T = 40^{\circ}C$ typ.at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			