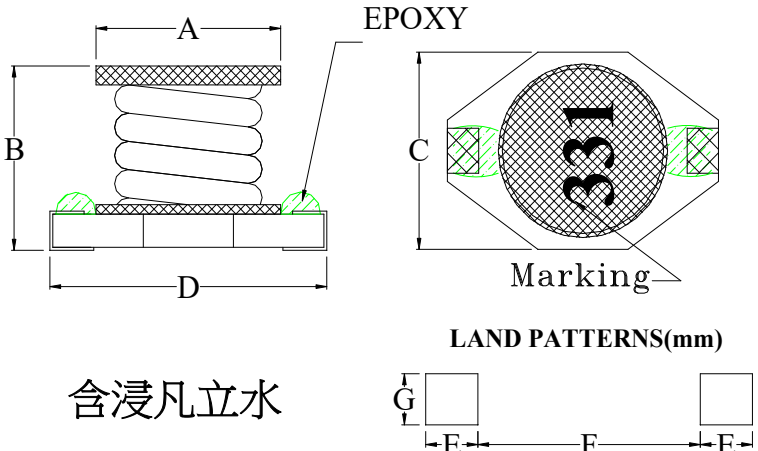


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802096
ITEM	JSPK 0804-331M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 LAND PATTERNS(mm)	A	9.0	Max.
	B	5.5	Max.
	C	9.5	Max.
	D	13.5	Max.
	E	2.92	REF.
	F	7.37	REF.
	G	2.79	REF.

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	330 ± 20% μ H	☒ AGILENT 4294A Precision Impedance Analyzer.
TEST FREQUENCY	100 KHz	☐ AGILENT 4285A Precision L.C.R.
TEST VOLT	0.1 V	☐ HP-4286A RF L.C.R. Meter.
RDC	1.02 (max) Ω	☒ ZENTECH 3302 Automatic Components Analyzer.
Isat	0.6 (max) A	☐ ZENTECH 101 L.C.R. Meter.
Irms	0.6 (max) A	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
		☒ ZENTECH 1320 BIAS CURRENT.
		☒ ZENTECH 502AC Resistance Merter.
		☐ ADEX AX-1155B DC Low Ohm Meter.

REMARK :

1. Inductance drop = 10% typ. at Isat.
2. $\Delta T = 40^{\circ}\text{C}$ typ. at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			