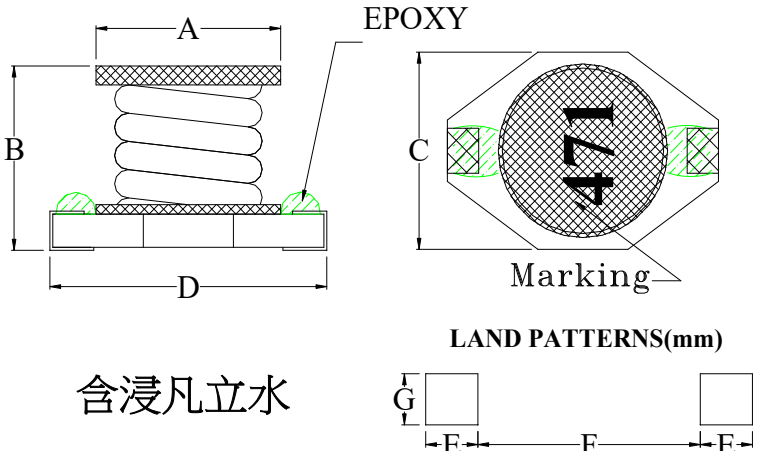


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802098
ITEM	JSPK 0804-471M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	9.0	Max.
	B	5.5	Max.
	C	9.5	Max.
	D	13.5	Max.
	E	2.92	REF.
	F	7.37	REF.
	G	2.79	REF.

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	$470 \pm 20\%$ μ H	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☐ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100 KHz	
TEST VOLT	0.1 V	
RDC	1.27 (max) Ω	
Isat	0.5 (max) A	
Irms	0.5 (max) A	

REMARK :

1. Inductance drop = 10% typ. at Isat.
2. $\Delta T = 40^{\circ}\text{C}$ typ. at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			