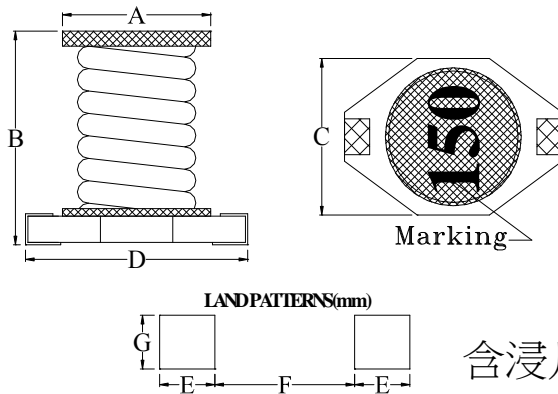


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802109
ITEM	JSPK 0810-150M	Green	版本：A 表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 <p style="text-align: center;">LAND PATTERNS(mm)</p> <p style="text-align: center;">含浸凡立水</p>	A	9.0	Max.
	B	11.5	Max.
	C	9.5	Max.
	D	13.5	Max.
	E	2.92	REF.
	F	7.37	REF.
	G	2.79	REF.
	H		
	I		
	J		

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.
INDUCTANCE	15 ± 20% μH
TEST FREQUENCY	100 KHz
TEST VOLT	0.1 V
RDC	50 (max) mΩ
Isat	7 (max) A
Irms	3 (max) A
	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Meter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.

REMARK :

1. Inductance drop = 10% typ at Isat.
2. ΔT = 40°C rise typ at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			

