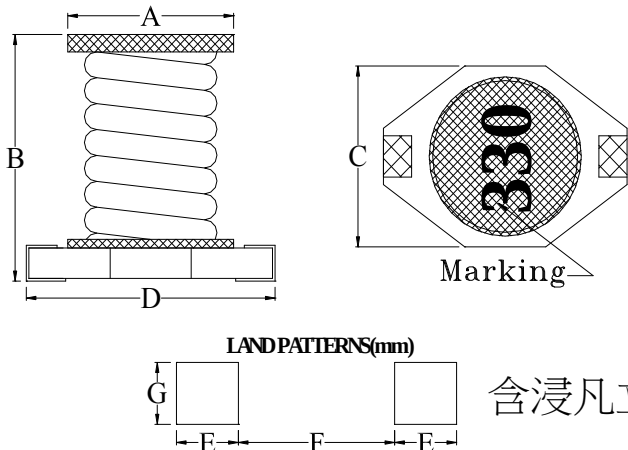


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802113
ITEM	JSPK 0810-330M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 LAND PATTERNS(mm) 含浸凡立水	A	9.0	Max.
	B	11.5	Max.
	C	9.5	Max.
	D	13.5	Max.
	E	2.92	REF.
	F	7.37	REF.
	G	2.79	REF.

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	$33 \pm 20\%$ μ H	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	100 KHz	☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter.
TEST VOLT	0.1 V	☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT.
RDC	80 (max) mΩ	☒ ZENTECH 502AC Resistance Merter. ☐ ADEX AX-1155B DC Low Ohm Meter.
Isat	4.0 (max) A	
Irms	2.0 (max) A	

REMARK :

1. Inductance drop = 10% typ.at Isat.
2. $\Delta T = 40^{\circ}\text{C}$ typ.at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			