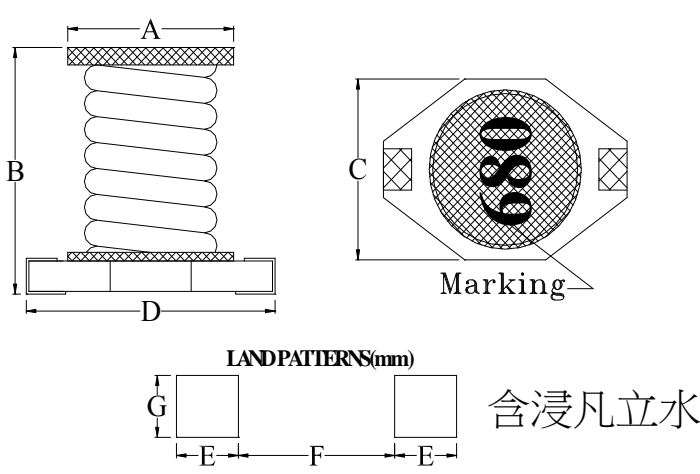


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802121
ITEM	JSPK 0810-680M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.	
	A	9.0	Max.	
	B	11.5	Max.	
	C	9.5	Max.	
	D	13.5	Max.	
	E	2.92	REF.	
	F	7.37	REF.	
	G	2.79	REF.	

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.
INDUCTANCE	68 ± 20% μH
TEST FREQUENCY	100 KHz
TEST VOLT	0.1 V
RDC	0.17 (max) Ω
Isat	3.0 (max) A
Irms	1.2 (max) A
	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.

REMARK :

1. Inductance drop = 10% typ. at Isat.

2. ΔT = 40°C typ. at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			