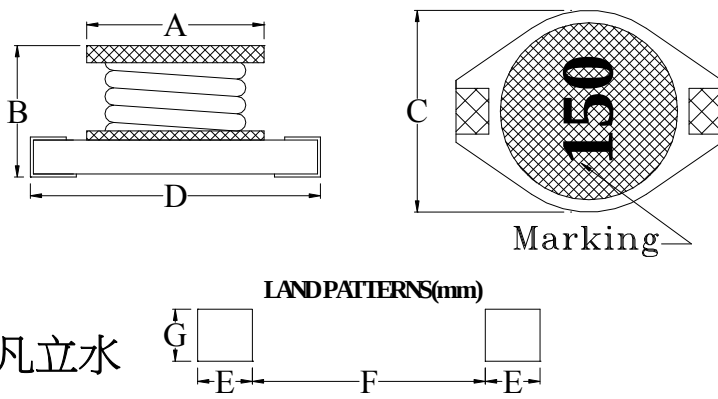


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802130
ITEM	JSPK 1306-150M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)			DIM.	TOL.	
 含浸凡立水		A	13.5	Max.	
		B	7.5	Max.	
		C	15.4	Max.	
		D	18.54	Max.	
		E	2.92	REF.	
		F	12.45	REF.	
		G	2.79	REF.	

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	15 ± 20% μ H	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	100 KHz	☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter.
TEST VOLT	0.1 V	☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT.
RDC	36 (max) m Ω	☒ ZENTECH 502AC Resistance Meter. ☐ ADEX AX-1155B DC Low Ohm Meter.
Isat	8.0 (max) A	
Irms	4.0 (max) A	

REMARK :

1. Inductance drop = 10% typ. at Isat.
2. $\Delta T = 40^{\circ}\text{C}$ typ. at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			