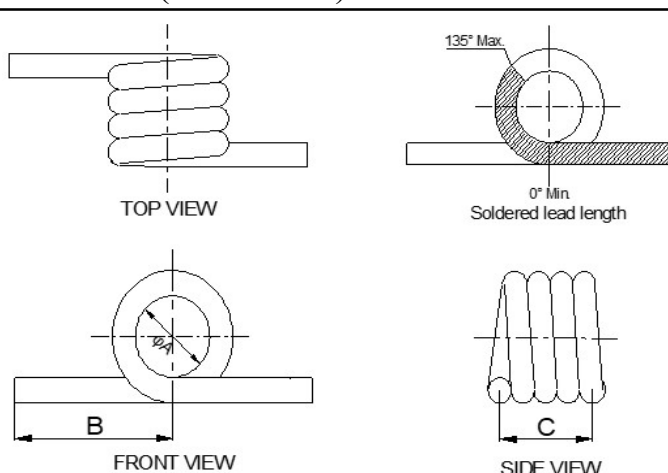


SPECIFICATION FOR APPROVAL

COMMODITY	SMD AIR WOUND COIL	SPEC NO.	SP-0230306002
ITEM	JAS 13742-07	Green	版本：A 表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 TOP VIEW FRONT VIEW SIDE VIEW 135° Max 0° Min Soldered lead length		A	1.12 ±0.30
		B	1.90 ±0.25
		C	1.30 ±0.25

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	8.5	nH	☐ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☐ ZENTECH 1320 BIAS CURRENT. ☐ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	10	KHz	

REMARK :

- Wire : Φ 0.4
- Turns : 3 Ts.
- Color : Natural
- Operating temp. : -25°C to +125°C

PURCHASER CONFIRMED :

APPROVED	CHECKED	DRAWN
		