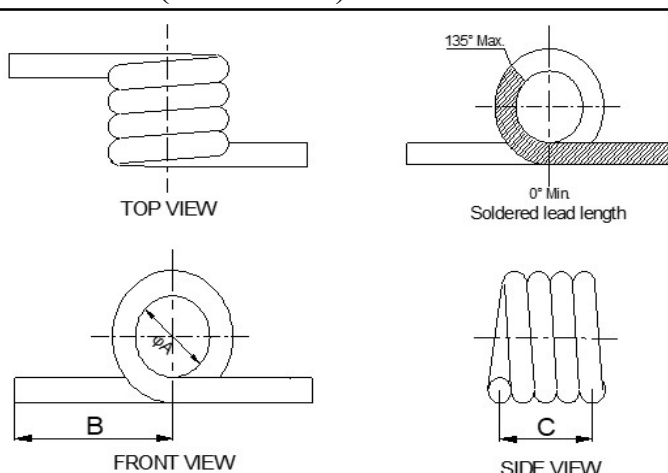


# SPECIFICATION FOR APPROVAL

|           |                                                                                  |          |                |
|-----------|----------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD AIR WOUND COIL                                                               | SPEC NO. | SP-0230306003  |
| ITEM      | JAS 13742-09 <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                                                                                                                                                        |  | DIM. | TOL.       |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|------|------------|
|  <p>TOP VIEW</p> <p>FRONT VIEW</p> <p>SIDE VIEW</p> <p>135° Max</p> <p>0° Min</p> <p>Soldered lead length</p> <p>B</p> <p>C</p> |  | A    | 0.98 ±0.30 |
|                                                                                                                                                                                                                  |  | B    | 1.90 ±0.25 |
|                                                                                                                                                                                                                  |  | C    | 1.72 ±0.25 |
|                                                                                                                                                                                                                  |  |      |            |
|                                                                                                                                                                                                                  |  |      |            |
|                                                                                                                                                                                                                  |  |      |            |
|                                                                                                                                                                                                                  |  |      |            |
|                                                                                                                                                                                                                  |  |      |            |

| (2) ELECTRICAL CHARACTERISTIC |      |     | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------------------|------|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 10.1 | nH  | <input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 10   | KHz |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                               |      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                               |      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                               |      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                               |      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|                               |      |     |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |

## REMARK :

1. Wire :  $\Phi$  0.4
2. Turns : 4 Ts.
3. Color : Natural
4. Operating temp. : -25°C to +125°C

## PURCHASER CONFIRMED :

APPROVED      CHECKED      DRAWN

楊  
偉鏗

姜  
秀琴

陳  
秀月