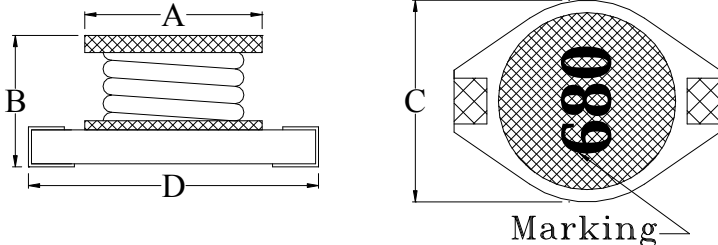


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802138
ITEM	JSPK 1306-680M Green	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)			DIM.	TOL.
 含浸凡立水 LAND PATTERNS(mm)	A	13.5	Max.	
	B	7.5	Max.	
	C	15.4	Max.	
	D	18.54	Max.	
	E	2.92	REF.	
	F	12.45	REF.	
	G	2.79	REF.	

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	68 ± 20% μH	☒ AGILENT 4294A Precision Impedance Analyzer. ☐ AGILENT 4285A Precision L.C.R. Meter. ☐ HP-4286A RF L.C.R. Meter. ☒ ZENTECH 3302 Automatic Components Analyzer. ☐ ZENTECH 101 L.C.R. Meter. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ ZENTECH 502AC Resistance Meter. ☐ ADEX AX-1155B DC Low Ohm Meter.
TEST FREQUENCY	100 KHz	
TEST VOLT	0.1 V	
RDC	130 (max) mΩ	
Isat	3.5 (max) A	
Irms	2.3 (max) A	

REMARK :

1. Inductance drop = 10% typ. at Isat.
2. ΔT = 40°C typ. at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			