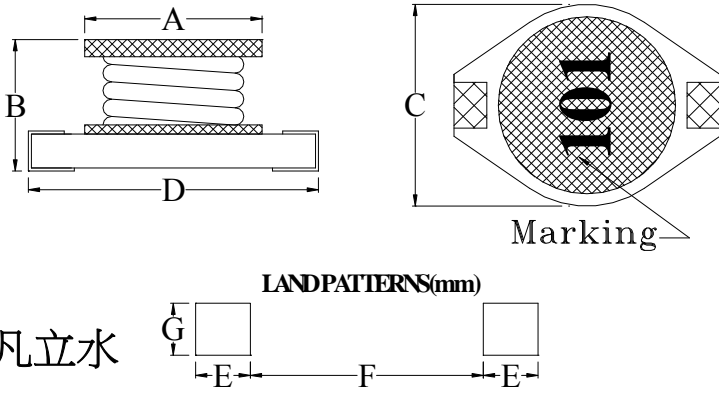


# SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802128
ITEM	JSPK 1306-101M <span style="border: 1px solid black; padding: 2px;">Green</span>	版本：A	表單編號：QRRD-01-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
 <p style="text-align: center;">LAND PATTERNS(mm)</p> <p>含浸凡立水</p>	A	13.5	Max.
	B	7.5	Max.
	C	15.4	Max.
	D	18.54	Max.
	E	2.92	REF.
	F	12.45	REF.
	G	2.79	REF.

(2) ELECTRICAL CHARACTERISTIC	TEST INSTRUMENTS.
INDUCTANCE	100 ± 20%    μH
TEST FREQUENCY	100    KHz
TEST VOLT	0.1    V
RDC	190 (max) mΩ
Isat	3.0 (max) A
Irms	1.8 (max) A
	<input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer. <input type="checkbox"/> AGILENT 4285A Precision L.C.R. Meter. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> ZENTECH 3302 Automatic Components Analyzer. <input type="checkbox"/> ZENTECH 101 L.C.R. Meter. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> ZENTECH 502AC Resistance Merter. <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter.

REMARK :

1. Inductance drop = 10% typ. at Isat.

2. ΔT = 40°C typ. at Irms.

PURCHASER CONFIRMED	APPROVED	CHECKED	DRAWN
			