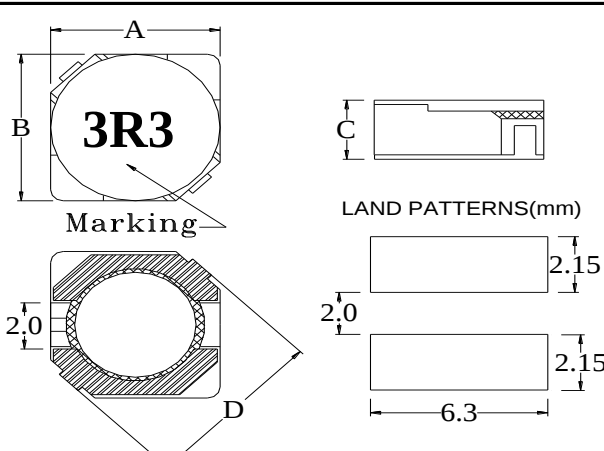


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0230418004
ITEM	JPRD 0502-3R3N Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	5.7	±0.3
	B	5.7	±0.3
	C	2.0	Max.
	D	8.2	Max.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	3.3 ± 30%	μ H	☒ AGILENT 4294A Precision Impedance Analyzer
TEST FREQUENCY	10	KHz	☐ Agilent 4287A RF LCR Meter
TEST VOLT	0.25	V	☐ AGILENT 4285A Precision L.C.R.
RDC	0.0516 (max)	Ω	☐ HP-4286A RF L.C.R. Meter.
IDC	2.00 (max)	A	☒ CHROMA 3302 Automatic Components Analyzer.
			☐ WAYNE KERR 6420 Precision Impedance Analyzer.
			☒ ZENTECH 1320 BIAS CURRENT.
			☒ BK PRECISION 2840 DC Resistance Meter
			☐ ZENTECH 502AC Resistance Merter
			☐ ADEX AX-1155B DC Low Ohm Meter
			☐ WAYNE KERR HI-POT TESTER 7600

REMARK :

- Inductance drop = 35% typ at IDC
- ΔT = 40°C rise typ at IDC

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			