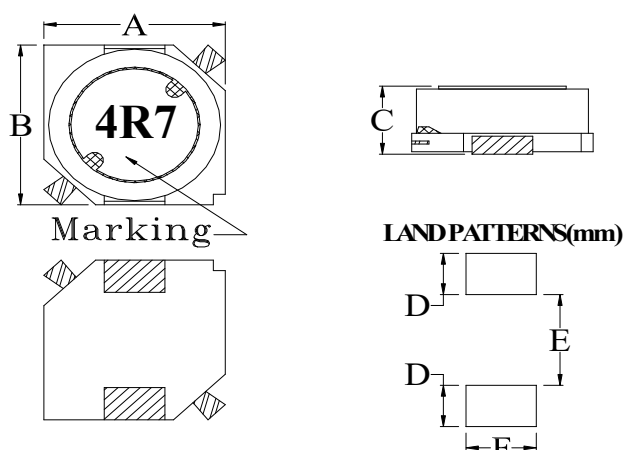


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-060802005
ITEM	JSB 0705-4R7M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	7.6	Max.
	B	7.6	Max.
	C	5.1	Max.
	D	2.0	REF.
	E	4.4	REF.
	F	3.0	REF.

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	$4.7 \pm 20\%$ μH	☒ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100 KHz	
TEST VOLT	0.1 V	
RDC	0.039 (max) Ω	
IDC	1.96 (max) A	

REMARK :

1. Inductance drop = 25% typ at IDC
2. $\Delta T = 40^\circ\text{C}$ rise typ at IDC

PURCHASER CONFIRMED :

APPROVED CHECKED DRAWN

楊
偉鏗

姜
秀琴

陳
秀月