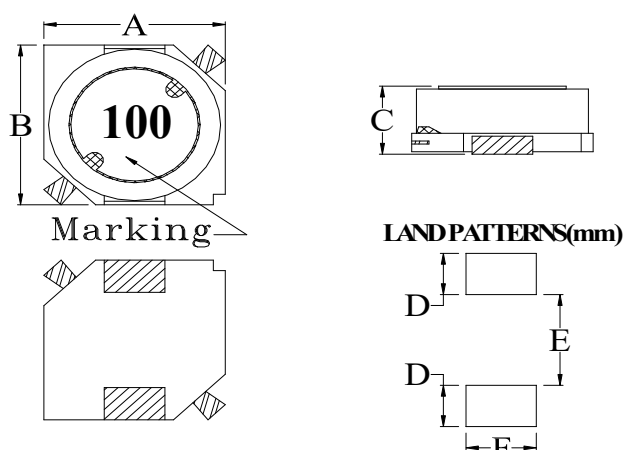


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0120321180
ITEM	JSB 0705-100M-A Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	7.6 Max.
		B	7.6 Max.
		C	5.1 Max.
		D	2.0 REF.
		E	4.4 REF.
		F	3.0 REF.

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	10 ± 20%	μH	☒ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter. ☒ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ ADEX AX-1155B DC Low Ohm Meter ☐ WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100	KHz	
TEST VOLT	0.1	V	
RDC	0.055 (max)	Ω	
IDC	1.63 (max)	A	

REMARK :

1. Inductance drop = 25% typ at IDC
2. ΔT = 40°C rise typ at IDC

PURCHASER CONFIRMED :

APPROVED CHECKED DRAWN

楊
偉鏗

姜
秀琴

陳
秀月