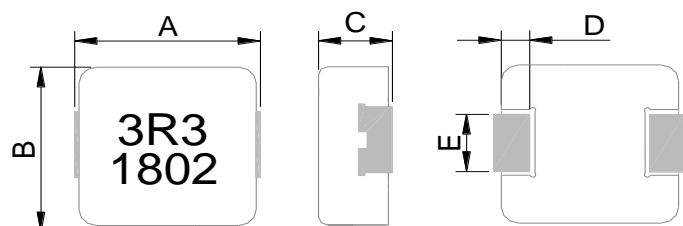


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0230331004
ITEM	JRPI 0503P-3R3M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.	
	A	5.70	± 0.30	
	B	5.20	± 0.20	
	C	2.80	± 0.20	
	D	1.00	± 0.30	
	E	2.00	± 0.20	

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS.
INDUCTANCE	3.3 ± 20%	μ H	<input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer <input type="checkbox"/> Agilent 4287A RF LCR Meter <input type="checkbox"/> AGILENT 4285A Precision L.C.R. <input type="checkbox"/> HP-4286A RF L.C.R. Meter. <input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer. <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer. <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT. <input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter <input type="checkbox"/> ZENTECH 502AC Resistance Merter <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter <input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600
TEST FREQUENCY	100	KHz	
TEST VOLT	1	V	
RDC	28.0 (typ.) 33.0 (max)	m Ω	
Isat	6.0 (typ.) 5.3 (max)	A	
Irms	6.3 (typ.) 5.8 (max)	A	

REMARK :

1. All test data referenced to 25°C ambient.
2. Saturation Current (Isat) will cause L0 to drop approximately 30%
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260


E-mail : jantek@jantek-elec.com.tw

Web-Site : www.jantek-elec.com.tw

TEST REPORT

SPEC NO : SP-0230331004

Typical Performance Curves

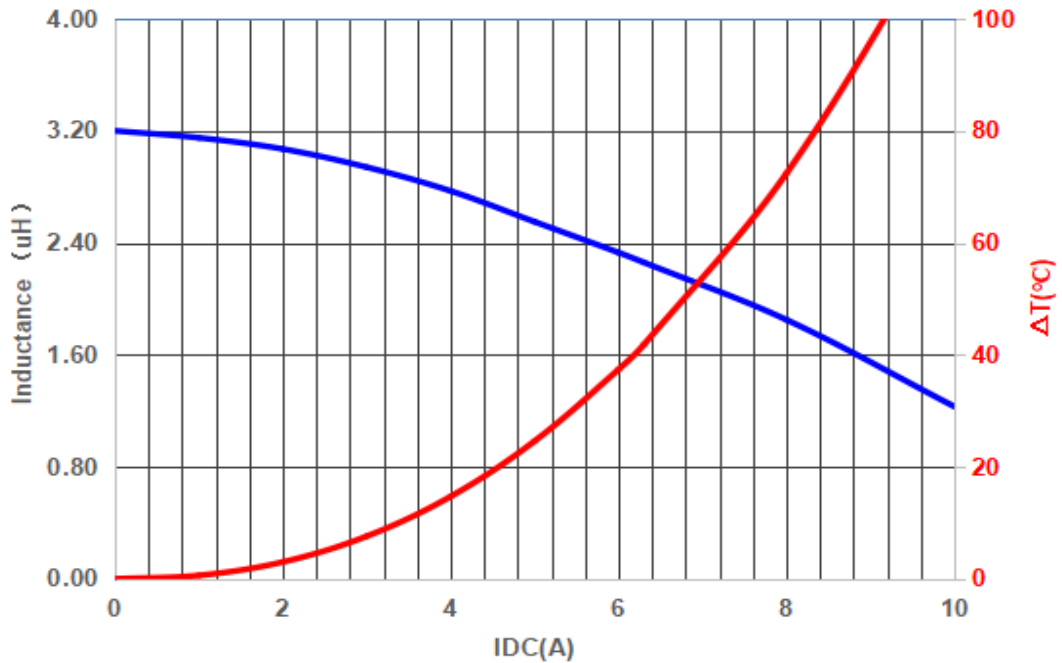

Test Instrument :

Chroma 3302 Automatic Components Analyzer
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28°C
Humidity : 60 to 70 % RH

Check by :

姜秀琴

Test by :

陳秀月



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw