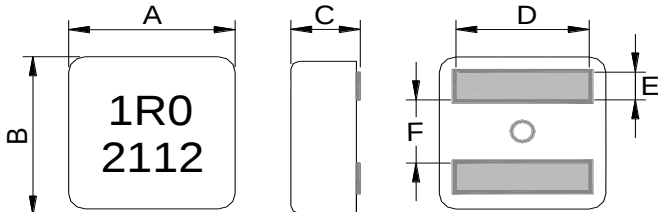


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0220516002
ITEM	JRPI 0503F-1R0M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	6.00 ±0.20
		B	5.70 ±0.20
		C	2.90 ±0.20
		D	4.30 ±0.30
		E	1.10 ±0.20
		F	2.30 ±0.25

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	1.0 ± 20% μ H	☒ AGILENT 4294A Precision Impedance Analyzer.
TEST FREQUENCY	100 KHz	☐ AGILENT 4285A Precision L.C.R. Meter.
TEST VOLT	0.1 V	☐ HP-4286A RF L.C.R. Meter.
RDC	6.90 (typ.) 7.60 (max) m Ω	☒ ZENTECH 3302 Automatic Components Analyzer.
Isat	16.5 (typ.) 14.3 (max) A	☐ ZENTECH 101 L.C.R. Meter.
Irms 20°C rise	9.0 (typ.) A	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
Irms 40°C rise	12.2 (typ.) A	☒ ZENTECH 1320 BIAS CURRENT.
		☒ ZENTECH 502AC Resistance Merter.
		☐ ADEX AX-1155B DC Low Ohm Meter.

REMARK :


1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%.
3. Rated operating voltage(across inductor) 40V ref.
4. Rated DC Current : The less value whith is Irms or Isat

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0220516002

Typical Performance Curves

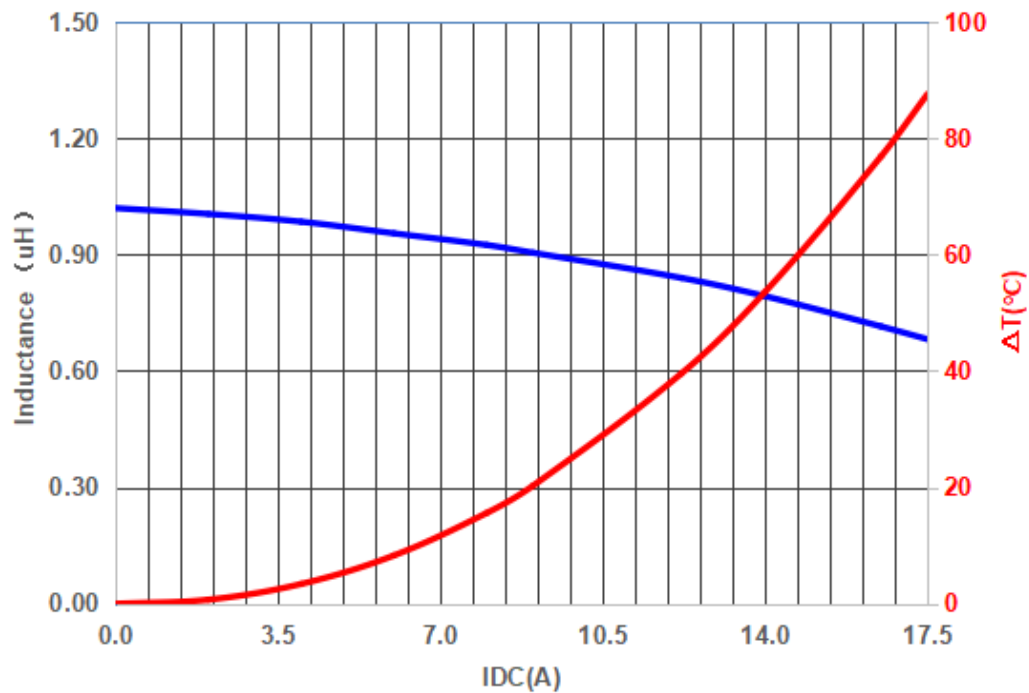

Test Instrument :

Chroma 3302 Automatic Components Analyzer
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28 $^{\circ}C$
Humidity : 60 to 70 % RH

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw