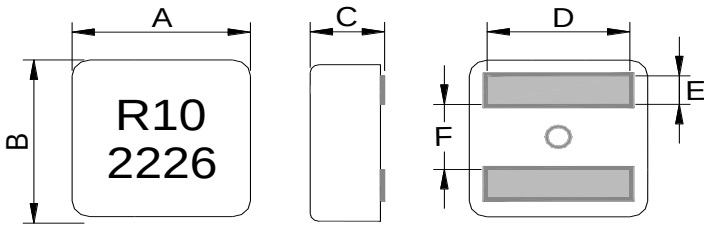


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0220630007
ITEM	JRPI 0402FV-R10M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
	A	4.40	±0.20
	B	4.40	±0.20
	C	1.90	±0.20
	D	3.40	±0.30
	E	0.88	±0.20
	F	1.60	±0.25

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	0.10 ± 20% μ H	☒ AGILENT 4294A Precision Impedance Analyzer
TEST FREQUENCY	100 KHz	☐ Agilent 4287A RF LCR Meter
TEST VOLT	0.1 V	☐ AGILENT 4285A Precision L.C.R.
RDC	2.20 (typ.) 2.42 (max) m Ω	☐ HP-4286A RF L.C.R. Meter.
Isat	38.0 (typ.) 33.0 (max) A	☒ CHROMA 3302 Automatic Components Analyzer.
Irms 20°C rise	13.5 (typ.) A	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
Irms 40°C rise	18.0 (typ.) A	☒ ZENTECH 1320 BIAS CURRENT.
		☒ BK PRECISION 2840 DC Resistance Meter
		☐ ZENTECH 502AC Resistance Merter
		☐ ADEX AX-1155B DC Low Ohm Meter
		☐ WAYNE KERR HI-POT TESTER 7600

REMARK :


1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%.
3. Rated operating voltage (across inductor) 15V ref (1.5uH and above)
Rated operating voltage (across inductor) 40V ref (1.2uH and below)

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0220630007

Typical Performance Curves

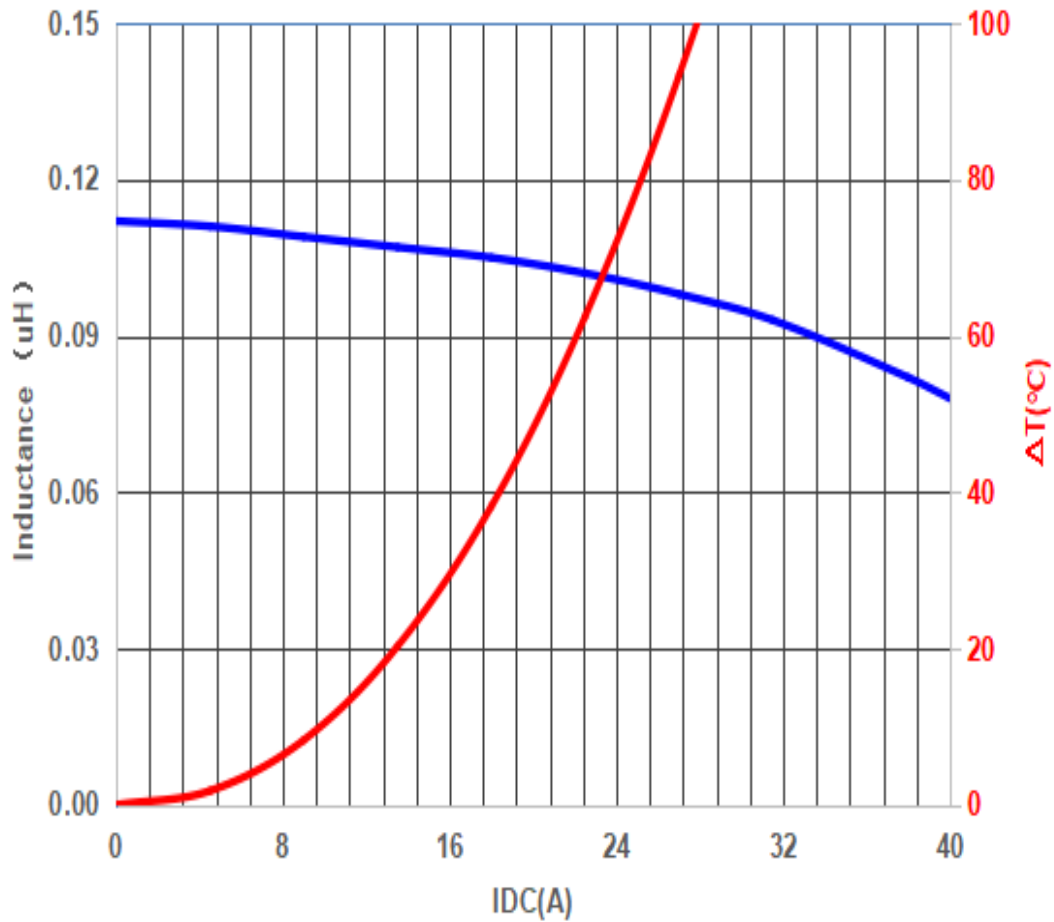

Test Instrument :

Chroma 3302 Automatic Components Analyzer
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28 $^{\circ}C$
Humidity : 60 to 70 % RH

Check by :

姜秀琴

Test by :

陳秀月



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw