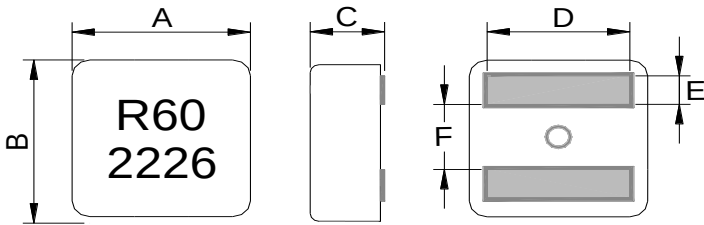


# SPECIFICATION FOR APPROVAL

|           |                                                                                      |          |                |
|-----------|--------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | SMD POWER COIL                                                                       | SPEC NO. | SP-0220630014  |
| ITEM      | JRPI 0402FV-R60M <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |   | DIM. | TOL.  |
|-----------------------------------------------------------------------------------|---|------|-------|
|  | A | 4.40 | ±0.20 |
|                                                                                   | B | 4.40 | ±0.20 |
|                                                                                   | C | 1.90 | ±0.20 |
|                                                                                   | D | 3.40 | ±0.30 |
|                                                                                   | E | 0.88 | ±0.20 |
|                                                                                   | F | 1.60 | ±0.25 |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |
|                                                                                   |   |      |       |

| (2) ELECTRICAL CHARACTERISTIC |                                      | TEST INSTRUMENTS.                                                              |
|-------------------------------|--------------------------------------|--------------------------------------------------------------------------------|
| INDUCTANCE                    | 0.60 ± 20% $\mu$ H                   | <input checked="" type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer |
| TEST FREQUENCY                | 100 KHz                              | <input type="checkbox"/> Agilent 4287A RF LCR Meter                            |
| TEST VOLT                     | 0.1 V                                | <input type="checkbox"/> AGILENT 4285A Precision L.C.R.                        |
| RDC                           | 8.60 (typ.)<br>9.52 (max) m $\Omega$ | <input type="checkbox"/> HP-4286A RF L.C.R. Meter.                             |
| Isat                          | 13.7 (typ.)<br>12.3 (max) A          | <input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer. |
| Irms 20°C rise                | 8.0 (typ.) A                         | <input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.         |
| Irms 40°C rise                | 11.7 (typ.) A                        | <input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.                 |
|                               |                                      | <input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter      |
|                               |                                      | <input type="checkbox"/> ZENTECH 502AC Resistance Merter                       |
|                               |                                      | <input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter                        |
|                               |                                      | <input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600                         |

## REMARK :


1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%.
3. Rated operating voltage (across inductor) 15V ref ( 1.5uH and above )  
Rated operating voltage (across inductor) 40V ref ( 1.2uH and below)

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |

# TEST REPORT

SPEC NO : SP-0220630014

Typical Performance Curves

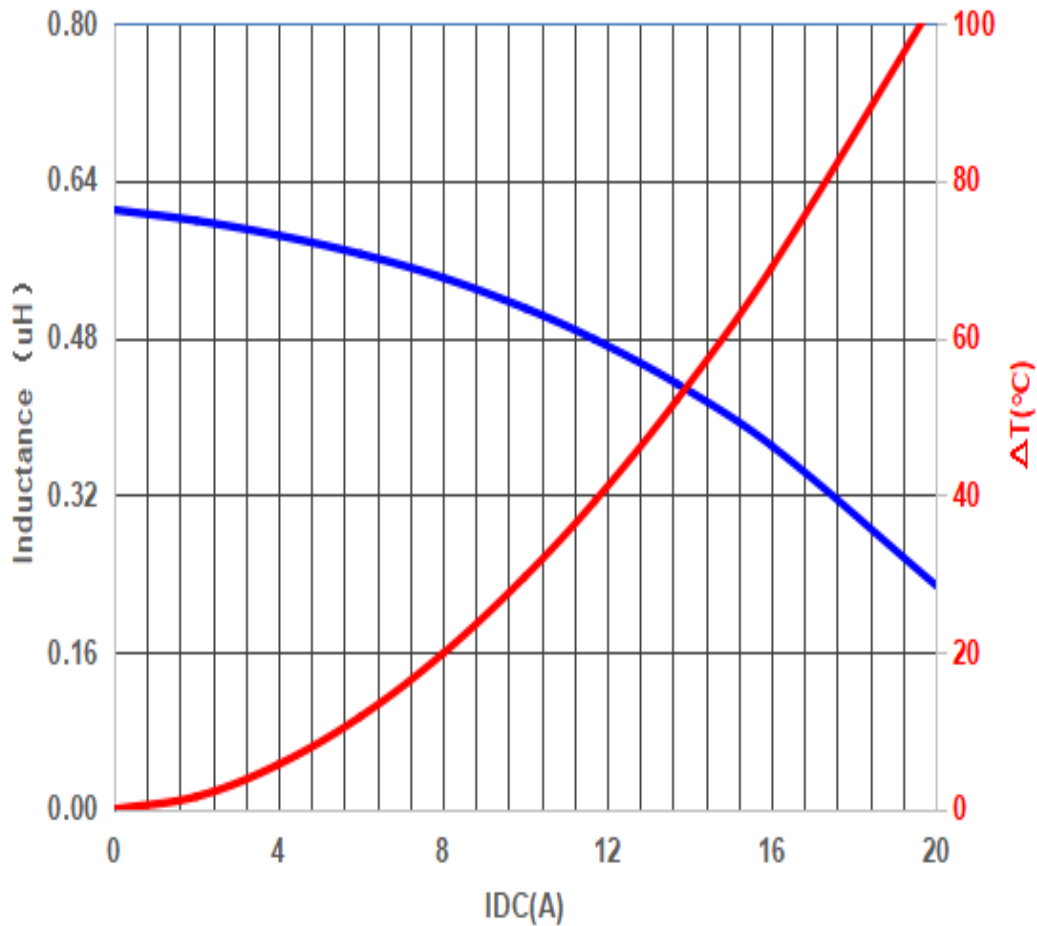

Test Instrument :

Chroma 3302 Automatic Components Analyzer  
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28 $^{\circ}C$   
Humidity : 60 to 70 % RH

Check by :

姜秀琴

Test by :

陳秀月



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260  
E-mail : jantek@jantek-elec.com.tw  
Web-Site : www.jantek-elec.com.tw