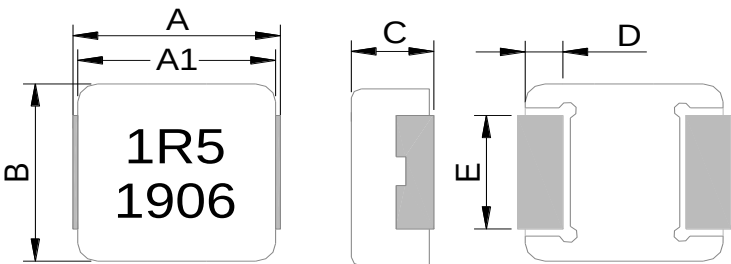


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0230323024
ITEM	JRPI 1707PV-1R5M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	17.80 ±0.50
		A1	16.90 ±0.30
		B	16.90 ±0.30
		C	6.70 ±0.30
		D	2.30 ±0.30
		E	11.90 ±0.30

(2) ELECTRICAL CHARACTERISTIC		TEST INSTRUMENTS.
INDUCTANCE	1.5 ± 20% μ H	☐ AGILENT 4294A Precision Impedance Analyzer
TEST FREQUENCY	100 KHz	☐ Agilent 4287A RF LCR Meter
TEST VOLT	1 V	☐ AGILENT 4285A Precision L.C.R.
RDC	1.5 (typ.) 1.8 (max) m Ω	☐ HP-4286A RF L.C.R. Meter.
Isat	46.0 (typ.) 40.0 (max) A	☒ CHROMA 3302 Automatic Components Analyzer.
Irms	39.0 (typ.) 35.0 (max) A	☐ WAYNE KERR 6420 Precision Impedance Analyzer.
		☒ ZENTECH 1320 BIAS CURRENT.
		☒ BK PRECISION 2840 DC Resistance Meter
		☐ ZENTECH 502AC Resistance Merter
		☐ ADEX AX-1155B DC Low Ohm Meter
		☐ WAYNE KERR HI-POT TESTER 7600

REMARK :

1. All test data referenced to 25°C ambient
2. Saturation Current (Isat) will cause L0 to drop approximately 30%
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately ΔT of 40°C
4. Compatible with AEC-Q200

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			




TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
 E-mail : jantek@jantek-elec.com.tw
 Web-Site : www.jantek-elec.com.tw

TEST REPORT

SPEC NO : SP-0230323024

Typical Performance Curves

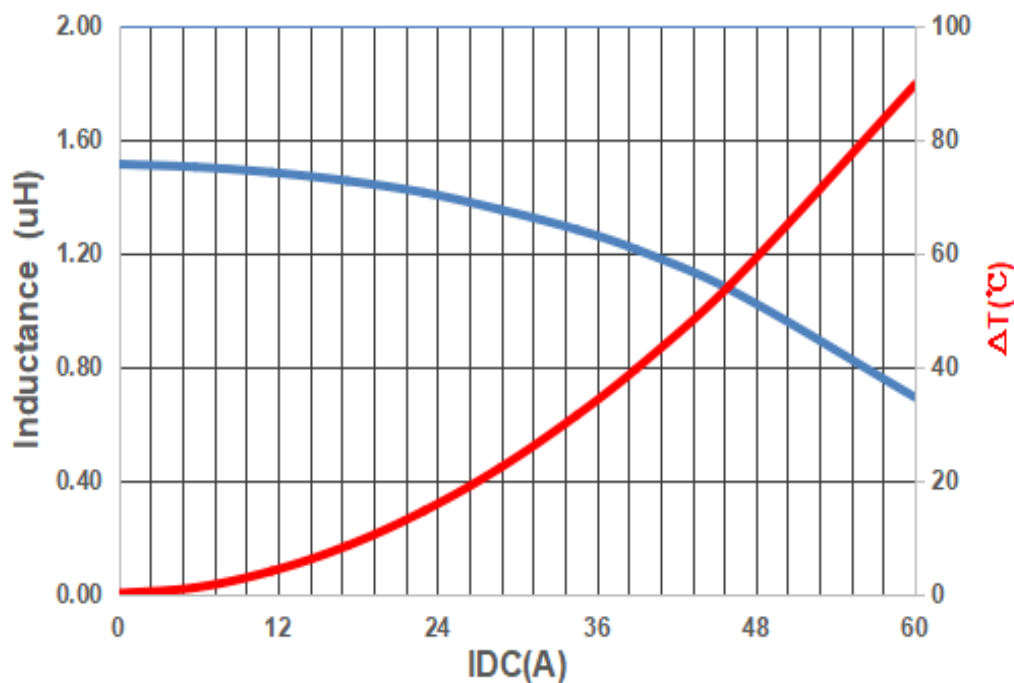

Test Instrument :

Chroma 3302 Automatic Components Analyzer
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28 $^{\circ}C$
Humidity : 60 to 70 % RH

Check by :



Test by :



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw