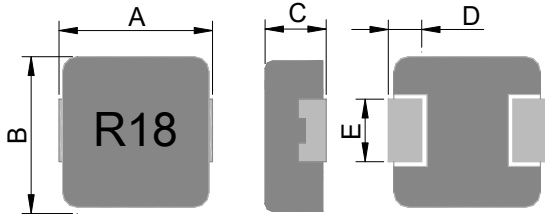


# SPECIFICATION FOR APPROVAL

|           |                                                                                     |          |                |
|-----------|-------------------------------------------------------------------------------------|----------|----------------|
| COMMODITY | Molding SMD Power Coils                                                             | SPEC NO. | SP-0181015020  |
| ITEM      | JRPI 0402V-R18N <span style="border: 1px solid black; padding: 0 2px;">Green</span> | 版本：A     | 表單編號：QR-012-02 |

| (1) DIMENSION: (UNIT: mm)                                                         |   | DIM. | TOL.   |
|-----------------------------------------------------------------------------------|---|------|--------|
|  | A | 4.45 | ± 0.25 |
|                                                                                   | B | 4.06 | ± 0.25 |
|                                                                                   | C | 1.80 | ± 0.20 |
|                                                                                   | D | 0.76 | ± 0.30 |
|                                                                                   | E | 2.00 | ± 0.20 |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |
|                                                                                   |   |      |        |

| (2) ELECTRICAL CHARACTERISTIC |                                    | TEST INSTRUMENTS.                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------|------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| INDUCTANCE                    | 0.18 ± 30% $\mu$ H                 | <input type="checkbox"/> AGILENT 4294A Precision Impedance Analyzer<br><input type="checkbox"/> Agilent 4287A RF LCR Meter<br><input type="checkbox"/> AGILENT 4285A Precision L.C.R.<br><input type="checkbox"/> HP-4286A RF L.C.R. Meter.<br><input checked="" type="checkbox"/> CHROMA 3302 Automatic Components Analyzer.<br><input type="checkbox"/> WAYNE KERR 6420 Precision Impedance Analyzer.<br><input checked="" type="checkbox"/> ZENTECH 1320 BIAS CURRENT.<br><input checked="" type="checkbox"/> BK PRECISION 2840 DC Resistance Meter<br><input type="checkbox"/> ZENTECH 502AC Resistance Merter<br><input type="checkbox"/> ADEX AX-1155B DC Low Ohm Meter<br><input type="checkbox"/> WAYNE KERR HI-POT TESTER 7600 |
| TEST FREQUENCY                | 100 KHz                            |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| TEST VOLT                     | 1 V                                |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| RDC                           | 4.6 (typ.)<br>5.4 (max) m $\Omega$ |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Isat                          | 28.0 (typ.) A                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
| Irms                          | 13.5 (typ.) A                      |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |
|                               |                                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         |

## REMARK :


1. All test data referenced to 25°C ambient
2. Saturation Current (Isat1) will cause L0 to drop approximately 30%
3. Heat Rated Current (Irms) will cause the coil temperature rise approximately  $\Delta T$  of 40°C
4. Compatible with AEC-Q200

| PURCHASER CONFIRMED : | APPROVED                                                                             | CHECKED                                                                               | DRAWN                                                                                 |
|-----------------------|--------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
|                       |  |  |  |

# TEST REPORT

SPEC NO : SP-0181015020

Typical Performance Curves

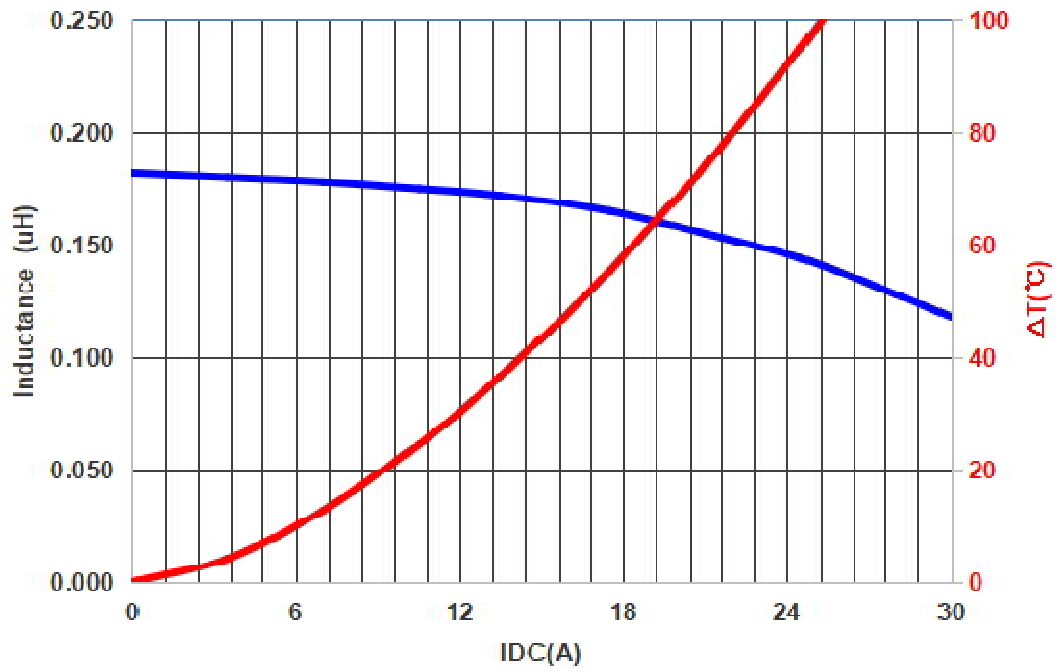

Test Instrument :

Chroma 3302 Automatic Components Analyzer  
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28°C  
Humidity : 60 to 70 % RH

Check by :



Test by :

