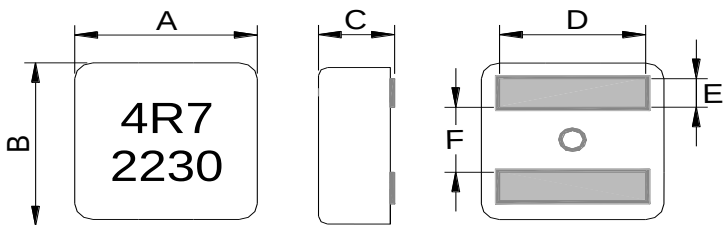


SPECIFICATION FOR APPROVAL

COMMODITY	SMD POWER COIL	SPEC NO.	SP-0220803007
ITEM	JRPI 0403FLV-4R7M Green	版本：A	表單編號：QR-012-02

(1) DIMENSION: (UNIT: mm)		DIM.	TOL.
		A	4.40 ±0.20
		B	4.40 ±0.20
		C	2.80 ±0.20
		D	3.40 ±0.30
		E	0.88 ±0.20
		F	1.60 ±0.25

(2) ELECTRICAL CHARACTERISTIC			TEST INSTRUMENTS
INDUCTANCE	4.7 ± 20%	μ H	☒ AGILENT 4294A Precision Impedance Analyzer ☐ Agilent 4287A RF LCR Meter ☐ AGILENT 4285A Precision L.C.R. ☐ HP-4286A RF L.C.R. Meter.
TEST FREQUENCY	100	KHz	
TEST VOLT	0.1	V	
RDC	40.1 (typ.) 44.1 (max)	mΩ	☐ CHROMA 3302 Automatic Components Analyzer. ☐ WAYNE KERR 6420 Precision Impedance Analyzer. ☒ ZENTECH 1320 BIAS CURRENT. ☒ BK PRECISION 2840 DC Resistance Meter ☐ ZENTECH 502AC Resistance Merter ☐ WAYNE KERR HI-POT TESTER 7600
Isat	1	2.8 (typ.) A	
	2	4.2 (typ.) A	
	3	5.5 (typ.) A	
	3	4.8 (max) A	
Irms 20°C rise	3.9 (typ.)	A	
Irms 40°C rise	5.1 (typ.)	A	

REMARK :


1. All test data referenced to 25°C ambient.
2. Current that causes the specified temperature rise from 25°C ambient.
3. Saturation Current (Isat 1) will cause L0 to drop approximately 10%.
 Saturation Current (Isat 2) will cause L0 to drop approximately 20%.
 Saturation Current (Isat 3) will cause L0 to drop approximately 30%.

PURCHASER CONFIRMED :	APPROVED	CHECKED	DRAWN
			

TEST REPORT

SPEC NO : SP-0220803007

Typical Performance Curves

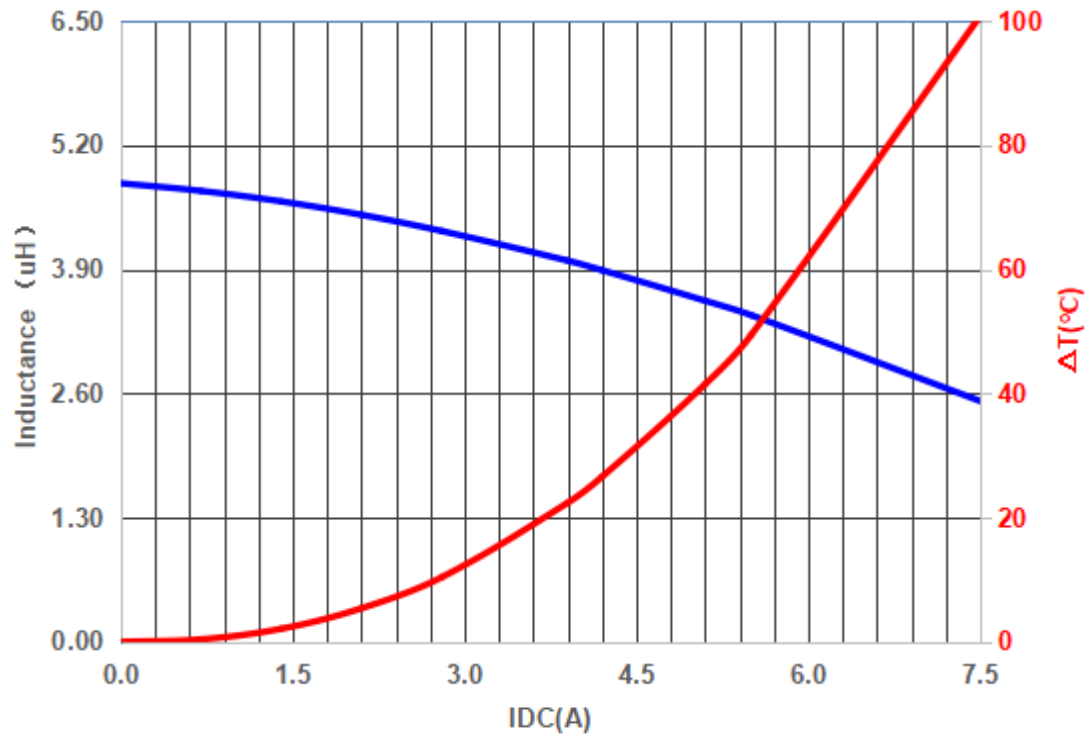

Test Instrument :

Chroma 3302 Automatic Components Analyzer
ZENTECH 1320 BIAS CURRENT

Testing Condition :

Temperature : 25 to 28 $^{\circ}C$
Humidity : 60 to 70 % RH

Check by :

姜秀琴

Test by :

陳秀月



TEL : 886-2-2689-4971 FAX : 886-2-2689-4260
E-mail : jantek@jantek-elec.com.tw
Web-Site : www.jantek-elec.com.tw